
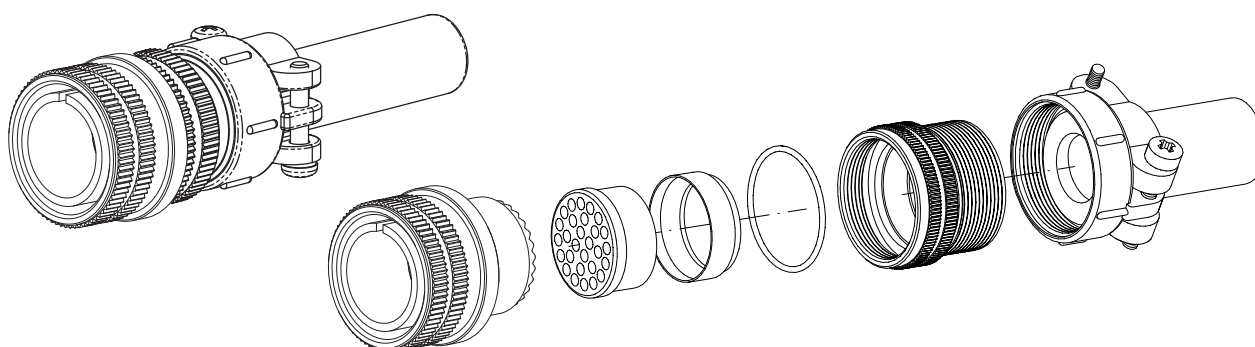


PAGE 1/4

ISSUE 17-09-20A

SERIES RF CVS

PART NUMBER RF CVS 06F 40A35P CR CD5 F16

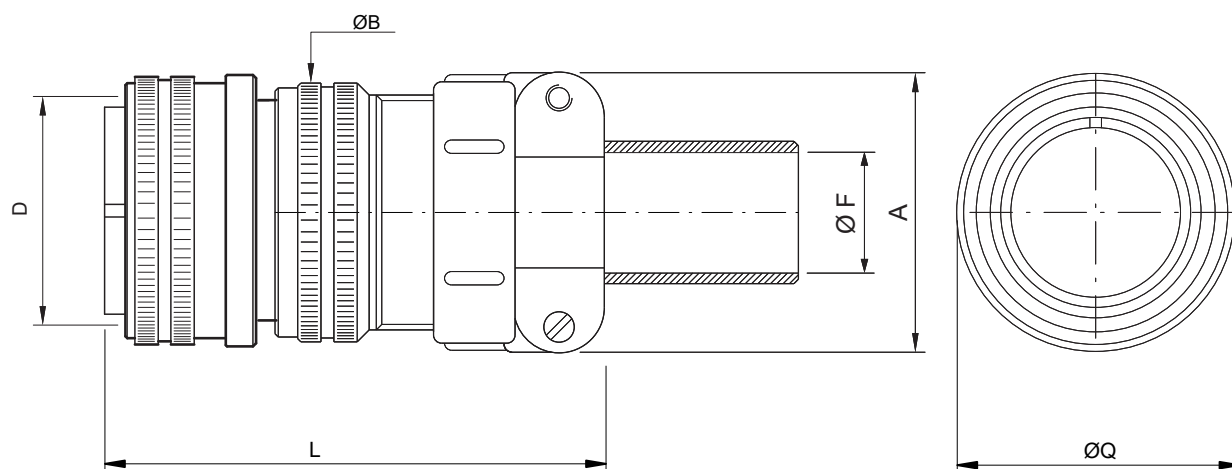

Shell size	D Connectors Thread in inches	ØQ ±0.2	L max	ØB ±0.2	A max	ØF cable max dimension
10SL	5/8"-24 UNEF	22.8	46	20	22.5	5.6
14S	7/8"-20 UNEF	28.5	55	24	28	7.9
16S	1"-20 UNEF	31.8	56.5	27	30	11
16	1"-20 UNEF	31.8	62.5	27	30	11
18	1"1/8-18 UNEF	34	67.5	30	31.7	14.2
20	1"1/4-18 UNEF	37.3	68	32	37.5	15.8
22	1"3/8-18 UNEF	40.5	70.5	37	37.5	15.8
24	1"1/2-18 UNEF	43.5	70.5	40	43.5	19
28	1"3/4-18 UNS	50	77.5	45	43.5	19
32	2"-18 UNS	56.1	77.5	52	51.7	23.8
36	2"1/4-16 UN	62.5	77.5	58	58.5	31.7
40	2"1/2-16 UN	69.1	93	63.8	68.5	34.9

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 17-09-20A

SERIES RF CVS

PART NUMBER RF CVS 06F 40A35P CR CD5 F16

Inserts

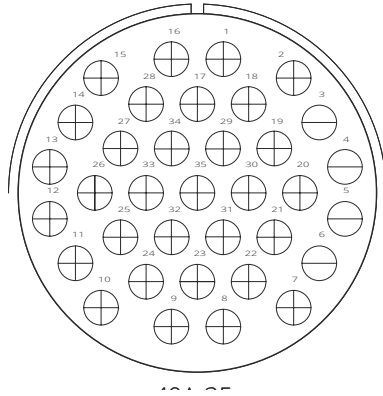


Arrangement	40A35
Gender	Pin
No. of contacts	35
Contacts size	N° 35 x #12 (41A Max)
Service Rating	D (1250Vdc - 900Vac)
Rotation	N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST485 12P CD5	35	12	crimp	3	12	8.3	CRT-784/1	LOC-784	CTIN-784-12	CTES-784-12	GP-784-12

--	--	--	--	--	--	--	--	--	--	--	--

Grommet *

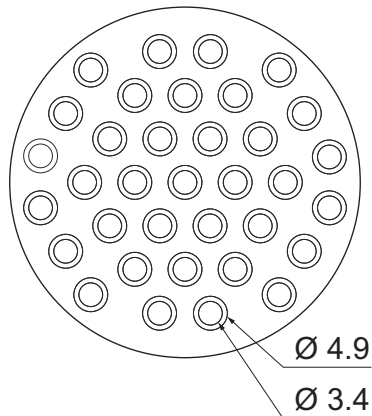

* Consult our sales office for wire specification

PAGE 3/4

ISSUE 17-09-20A

SERIES RF CVS

PART NUMBER RF CVS 06F 40A35P CR CD5 F16

Code details

Insert material	RF	Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)
Series	CVS	Thread connectors
Shell material	–	Aluminum alloy
Shell Type	06	Plug connector for straight backshell, with coupling nut
Connector Class	F	Backshell provided with MS3057..A type cable-clamp, bushing MS 3420.., grommet and cone
Accessories	–	-
Accessories	–	-
Accessories	–	-
Insert	40A35	Arrangement 40A35
Gender Contacts	P	Pin
Polarization	–	N (0°)
Backshell Details	–	-
Contacts Termination	CR	Crimp
Contact Plating	CD5	Nickel + gold 0.4 µ min
Shell Finish	F16	CCF black, conductive - RoHS compliant
Panel Gasket	–	-
Contact modification code	–	-
Customization	–	-

PAGE 4/4

ISSUE 17-09-20A

SERIES RF CVS

PART NUMBER RF CVS 06F 40A35P CR CD5 F16

Shell type:

Thread connectors

Plug connector for straight backshell, with coupling nut

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529
- EN45545-2, NFPA130 (ASTME162, ASTM662, BSS7239)
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 40A35; Pin; the insert is supplied with rotation: N (0°)

Contact: n.35 size 12; Crimp

Operating temperatures: -55°C ÷ +125°C

Protection (mated connectors with adequate accessories): non environmental

Insulating rubber parts: Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTM662, BSS7239)

Connector supplied with:

- Backshell provided with MS3057..A type cable-clamp, bushing MS 3420.., grommet and cone

Electrical specifications:

Nominal Voltage: 1250 Vdc / 900 Vac (service D)

Test Voltage: 2800 Vac

Current Rating, single contact:

- maximum current: 41A (#12) with ambient temperature 20°C
- rated current: 23A (#12) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Aluminum alloy	CCF black, conductive - RoHS compliant	P/N	Description	Quantity
Insulating	Fire behaviour (fire and smoke)	-	-	-	-
Contacts	Copper alloy	Nickel + gold 0.4 µ min	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

* Insulating Class parts: fire behaviour (fire and smoke) complying with EN 45545-2 Par. 4.3.1 (< 10 g), NFPA130 Par. 8.4.1.10 (< 100 cm²)

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-



Radiall VanSystem S.r.l. | www.vansystem.eu - www.radiall.com