
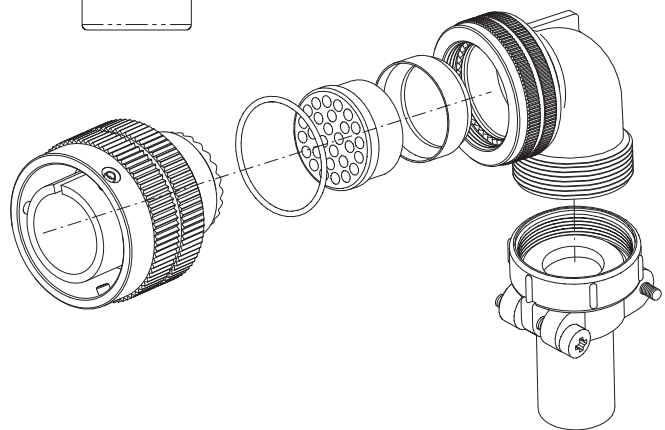

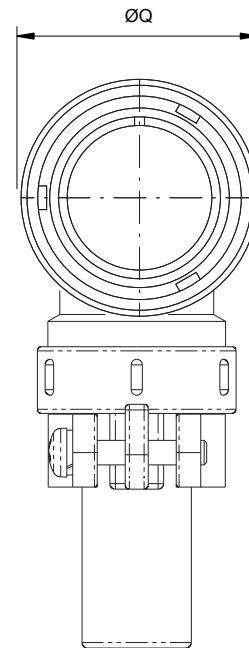


PAGE 1/4

ISSUE 19-10-23A

SERIES RF CVBS

PART NUMBER RF CVBS 08F 16S-1S CR CD5 F7

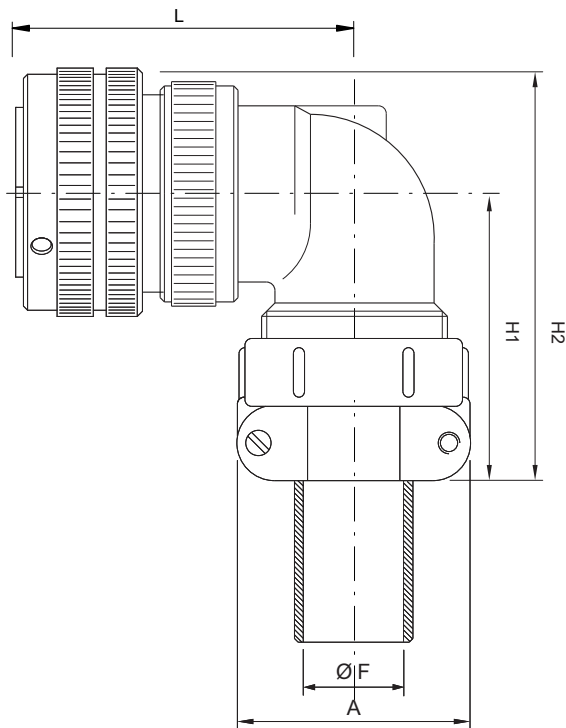

Shell size	ØQ ±0.2	L max	H1 max	H2 max	A max	ØF cable max dimension
10SL	23.3	45.5	39	50.7	22.5	5.6
14S	29.5	45.5	39	53.3	28	7.9
16S	33	47	42.5	58.4	30	11
16	33	56.5	42.5	58.4	30	11
18	37	57.5	47	64.1	31.7	14.2
20	41	60	47.5	66.2	37.5	15.8
22	43	62.5	49.5	69.8	37.5	15.8
24	48	65.5	53.5	75.3	43.5	19
28	53	65.5	55.5	80.5	43.5	19
32	60	70	61.5	89.6	51.7	23.8
36	66.2	73.5	64.5	95.8	58.5	31.7
40	72.4	78.5	82	116.6	68.5	34.9

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 19-10-23A

SERIES RF CVBS

PART NUMBER RF CVBS 08F 16S-1S CR CD5 F7

Inserts

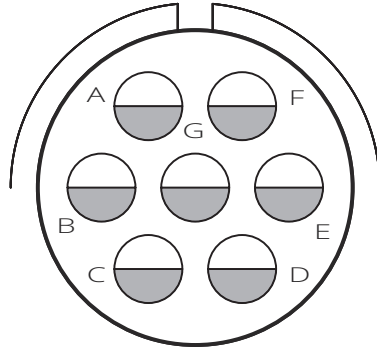

Arrangement	16S-1
Gender	Socket
No. of contacts	7
Contacts size	N° 7 x #16S (22A Max)
Service Rating	A (700Vdc - 500Vac)
Rotation	N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST485 16SS CD5	7	16S	crimp	1÷1.5	18÷16	6.3	CRT-784/1	LOC-784	CTIN-784-16	CTES-784-16	GP-784-16

--	--	--	--	--	--	--	--	--	--	--	--

Grommet *

Wire Outside Diameter

Size	mm
#16S	2.6

* Consult our sales office for wire specification

PAGE 3/4

ISSUE 19-10-23A

SERIES RF CVBS

PART NUMBER RF CVBS 08F 16S-1S CR CD5 F7

Code details

Insert material	RF	Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)
Series	CVBS	Bayonet connector with protected mating ramps
Shell material	–	Aluminum alloy
Shell Type	08	Plug connector, with 90° elbow and coupling nut
Connector Class	F	Backshell provided with MS3057..A type cable-clamp, bushing MS 3420..., grommet and cone (single wire)
Accessories	–	–
Accessories	–	–
Accessories	–	–
Insert	16S-1	Arrangement 16S-1
Gender Contacts	S	Socket
Polarization	–	N (0°)
Backshell Details:	–	–
Contacts termination	CR	Crimp
Contacts plating	CD5	Nickel + gold 0.4 µ min
Shell Finish	F7	Black epoxy-polyurethane varnish (non conductive), RoHS compliant
Panel Gasket	–	–
Contact modification code	–	–
Customization	–	–

PAGE 4/4

ISSUE 19-10-23A

SERIES RF CVBS

PART NUMBER RF CVBS 08F 16S-1S CR CD5 F7

Shell type:

Bayonet connector with protected mating ramps
Plug connector, with 90° elbow and coupling nut

Reference Documents:

- SAE AS 50151 (ex MIL-C-5015 where applicable)
- VG 95234 (where applicable)
- EN 60529
- EN45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 16S-1; Socket; the insert is supplied with rotation: N (0°)
Contact: n.7 size 16S; Crimp

Operating Temperature: -55 ÷ +150°C

IP Protection degree according EN60529: IP67 or IP68 (10meters 12hours, according to the application, connector series and shell type)

Insulating rubber parts: Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)

Connector supplied with:

- Backshell provided with MS3057..A type cable-clamp, bushing MS 3420.., grommet and cone (single wire)

Electrical specifications:

Nominal Voltage: 700 Vdc / 500 Vac (service A)

Test Voltage: 2000 Vac

Current Rating, single contact:

- maximum current: 22A (#16S) with ambient temperature 20°C
- rated current: 13A (#16S) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
			P/N	Description	Quantity
Shells	Aluminum alloy	Black epoxy-polyurethane varnish (non conductive), RoHS compliant			
Insulating	Fire behaviour * (fire and smoke)	-	-	-	-
Contacts	Copper alloy	Nickel + gold 0.4 µ min	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-			

* Insulating Class parts: fire behaviour (fire and smoke) complying with EN 45545-2
Par. 4.3.1 (< 10 g), NFPA130 Par. 8.4.1.10 (< 100 cm²)

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-