
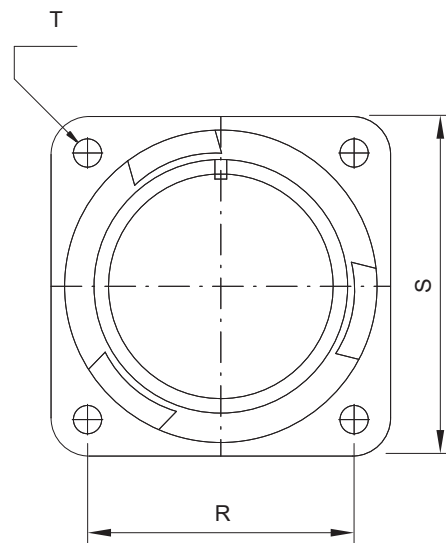
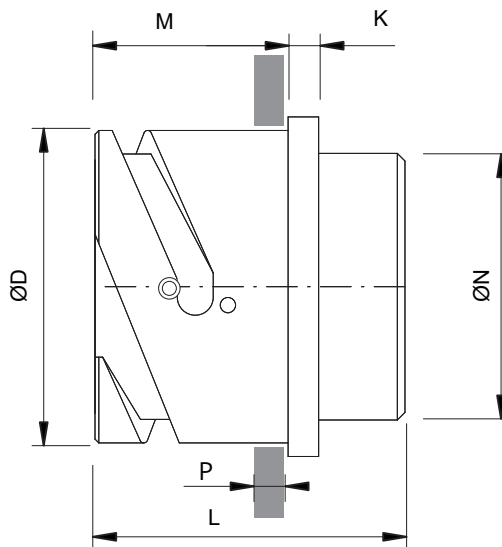
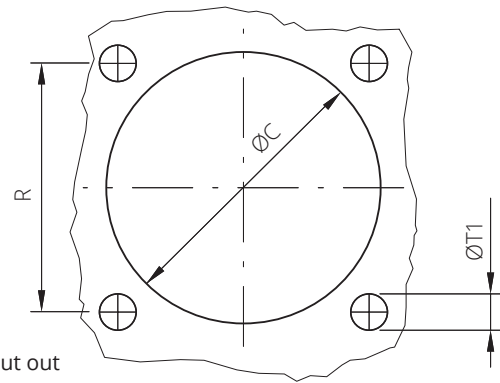


PAGE 1/4

ISSUE 15-07-20A

SERIES RF CVBS

PART NUMBER RF CVBS 03R 14S-2P CR CD5 F7 G

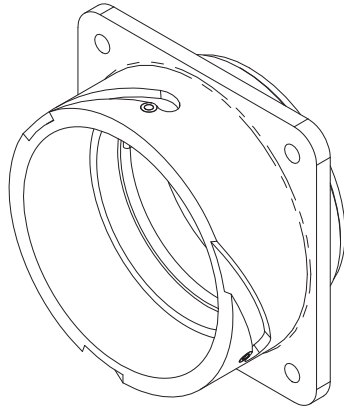

Shell size	ØD +0 -0.15	L	K ±0.2	M ±0.2	ØN Max	R ±0.1	S ±0.3	ØT	ØT1	ØC ±0.2	P Panel Thickness Max
10SL	18.2	30	2.8	18.2	16.1	18.2	25.4	M4	4.5	19.1	6
14S	24.6	30	3.2	18.6	19.2	23	30.2	M4	4.5	25.5	7.2
16S	27.4	30	3.2	18.6	22.5	24.6	32.5	M4	4.5	28.3	7.2
16	27.4	38.8	3.2	23.05	22.4	24.6	32.5	M4	4.5	28.3	5.35
18	30.8	38.5	4	23.4	25.6	27	34.9	M4	4.5	31.7	7.25
20	34.2	39.1	4	23.4	28.8	29.4	38.1	M4	4.5	35	7.3
22	37.4	39.3	4	23.4	32.2	31.8	41	M4	4.5	38.3	7.3
24	40.9	38.8	4	23.4	35.3	34.9	44.5	M4	4.5	41.8	6.85
28	46.7	39.1	4	24.4	41.5	39.7	50.8	M5	5.5	47.6	7.8
32	53.4	38.4	4	24.4	47.8	44.5	57	M5	5.5	54.3	7.5
36	59.6	39.9	4	24.4	52.6	49.2	63.5	M5	5.5	60.5	7.5
40	65.5	38.5	4	24.4	59.2	55.6	69.8	M5	5.5	66.4	7.5

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 15-07-20A

SERIES RF CVBS

PART NUMBER RF CVBS 03R 14S-2P CR CD5 F7 G

Inserts



Arrangement 14S-2

Gender Pin

No. of contacts 4

Contacts size N° 4 x #16S (22A Max)

Service Rating I (250Vdc - 200Vac)

Rotation N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST485 16SP CD5	4	16S	crimp	1÷1.5	18÷16	6.5	CRT-784/1	LOC-784	CTIN-784-16	CTES-784-16	GP-784-16

PAGE 3/4

ISSUE 15-07-20A

SERIES RF CVBS

PART NUMBER RF CVBS 03R 14S-2P CR CD5 F7 G

Code details

Insert material	RF	Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, AST-ME662, BSS7239)
Series	CVBS	Bayonet connector with protected mating ramps
Shell material	_	Aluminum alloy
Shell Type	03R	Rear mounting receptacle connector enviromental seal (unable to accept rear accessories)
Connector Class	_	No rear accessories
Accessories	-	-
Accessories	-	-
Accessories	-	-
Insert	14S-2	Arrangement 14S-2
Gender Contacts	P	Pin
Polarization	_	N (0°)
Backshell Details	-	-
Contacts Termination	CR	Crimp
Contact Plating	CD5	Nickel + gold 0.4 µ min
Shell Finish	F7	Black epoxy-polyurethane varnish (non conductive), RoHS compliant
Panel Gasket	G	Panel gasket
Contact modification code	-	-
Customization	-	-

PAGE 4/4

ISSUE 15-07-20A

SERIES RF CVBS

PART NUMBER RF CVBS 03R 14S-2P CR CD5 F7 G

Shell type:

Bayonet connector with protected mating ramps

Rear mounting receptacle connector enviromental seal (unable to accept rear accessories)

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529
- EN45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 14S-2; Pin; the insert is supplied with rotation: N (0°)

Contact: n.4 size 16S; Crimp

Operating temperatures: -55°C ÷ +125°C

Protection degree (mated connectors; according to EN 60529): IP67

Insulating rubber parts: Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)

Connector supplied with:

- No rear accessories
- Panel gasket

Electrical specifications:

Nominal Voltage: 250 Vdc / 200 Vac (service I)

Test Voltage: 1000 Vac

Current Rating, single contact:

- maximum current: 22A (#16S) with ambient temperature 20°C
- rated current: 13A (#16S) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Aluminum alloy	Black epoxy-polyurethane varnish (non conductive), RoHS compliant	P/N	Description	Quantity
Insulating	Fire behaviour (fire and smoke)	-	C216-14	Panel gasket	1
Contacts	Copper alloy	Nickel + gold 0.4 µ min	-	-	-
Panel Gasket	Chloroprene rubber *	-	-	-	-
Others part	-	-	-	-	-

* Insulating rubber parts: fire behaviour (fire and smoke) complying with EN 45545-2 Par. 4.3.1 (< 10 g), NFPA130 Par. 8.4.1.10 (< 100 cm²)



Radiall VanSystem S.r.l. | www.vansystem.eu - www.radiall.com

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-