

2 W

DC-12.4GHz


SMA

COAXIAL ATTENUATOR

issue
28.jul.93

Page
1 / 1

DRAWING

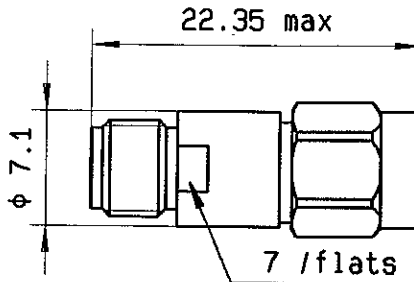

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 12.4 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 12 dB

FREQUENCY	DC- 4 GHz	4 -12.4GHz
V.S.W.R	<= 1.15	<= 1.25
DEVIATION (dB)	+0.5 / -0.5	+0.5 / -0.5


TEMPERATURE SENSITIVITY : 4×10^{-4} dB / dB * °C
 PEAK POWER at 25°C (1 μ s,1%) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

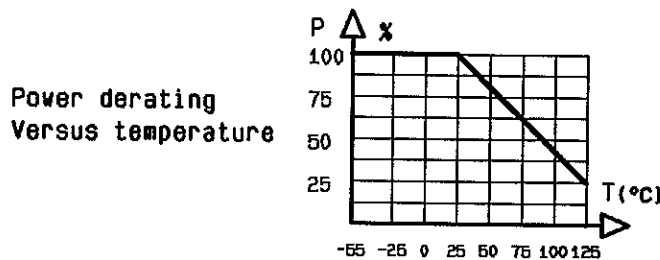

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

QUALITY R4
 Dpt app R
 CREATION
 PEN : CAT
 EP :
 Nom : DP
 Date: 02.mar.89

28.jul.93	New format	VE
ISSUE	REVISIONS	NAME

RADIAL[®]

101. Philibert Hoffmann
 - Z.I Ouest -
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone: 33.1.49353635
 Fax : 33.1.48546363
 Tlx RADIA 235220F