

2 W

DC-12.4GHz


SMA

COAXIAL ATTENUATOR

issue
28. jul.93

Page
1 / 1

DRAWING

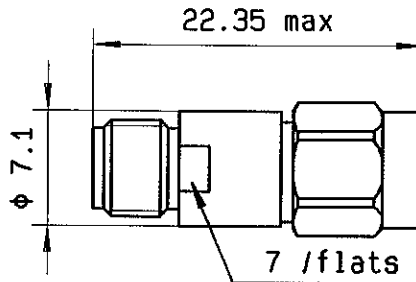

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 12.4GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 15 dB-

FREQUENCY	DC- 4 GHz	4 -12.4GHz
V.S.W.R	<= 1.15	<= 1.25
DEVIATION (dB)	+0.6 /- 0.6	+0.6 /- 0.6


TEMPERATURE SENSITIVITY : $4 \times 10^{-4} \frac{dB}{dB \times ^\circ C}$
 PEAK POWER at 25°C (1µs,1%.) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

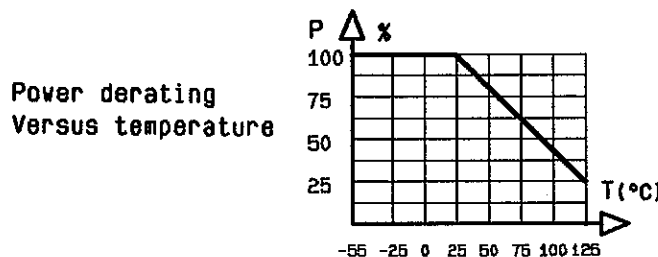

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

QUALITY Dpt app. R4 B			
CREATION PEN : CAT EP : Nom : DP Date : 02.mar.89	28.jul.93	New format	VE
ISSUE		REVISIONS	NAME

RADIALL®

101. Philibert Hoffmann - Z.I. Ouest -
53116 ROSNY/BOIS Cedex-FRANCE
 Phone:33.1.49353535
 Fax :33.1.48546369
 Tlx RADIA 235220F