

2 W

DC-12.4GHz


SMA

COAXIAL ATTENUATOR

issue  
28. jul. 93

Page  
1 / 1

**DRAWING**

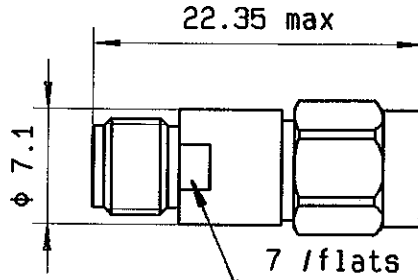

General tolerances: +/- 0.5 mm

**R F CHARACTERISTICS**

FREQUENCY RANGE : DC - 12.4 GHz  
 IMPEDANCE : 50 Ohms  
 ATTENUATION - NOMINAL : 16 dB

FREQUENCY	DC- 4 GHz	4 -12.4GHz
V.S.W.R	<= 1.15	<= 1.25
DEVIATION (dB)	+0.6 / -0.6	+0.6 / -0.6

TEMPERATURE SENSITIVITY :  $4 \times 10^{-4}$  dB  
 dB \* °C  
 PEAK POWER at 25°C (1µs, 1%) : 100 W  
 AVERAGE POWER at 25°C : 2 W


**MECHANICAL CHARACTERISTICS**

CONNECTORS : SMA male/female per MIL-C 39012  
 WEIGHT : < 5 g

**ENVIRONMENTAL CHARACTERISTICS**

OPERATING TEMPERATURE RANGE (°C) : -55 , +125  
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

Power derating  
Versus temperature

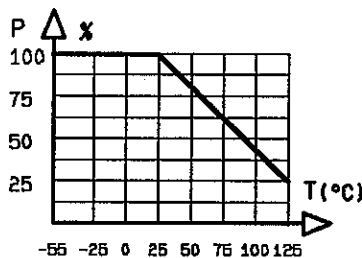

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9211

QUALITY R4			
Dpt app. B			
CREATION			
PEN : CAT			
EP : -----			
Nom : DP	28. jul. 93	New format	VE
Date: 02. mar. 89	ISSUE	REVISIONS	NAME

**RADIALL®**

101. Philibert Hoffmann  
 - Z.I Ouest -  
 93115 ROSNY/BOIS Cedex-FRANCE  
 Phone: 33.1.48363635  
 Fax : 33.1.48546363  
 Tlx RADIA 235220F