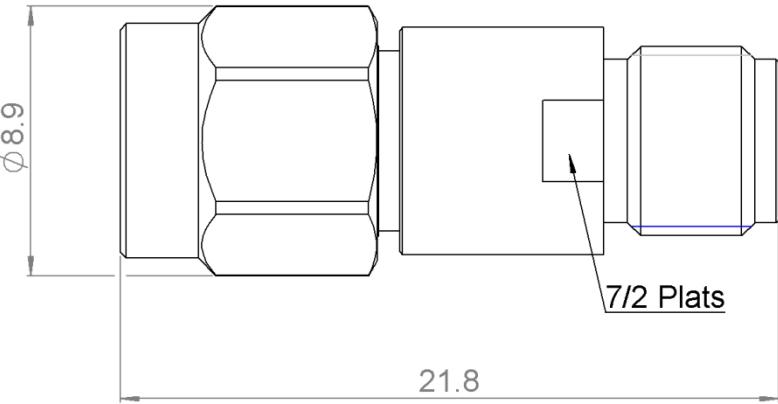
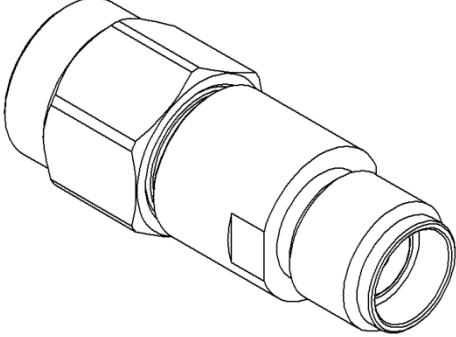

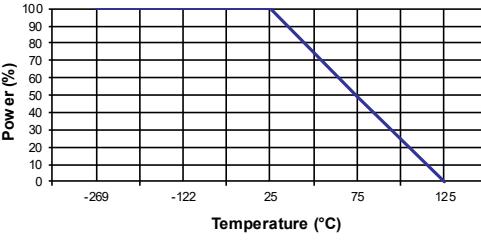


PAGE 1/2	ISSUE 18-12-24A	SERIES ATTENUATOR	PART NUMBER <b>R429806101</b>
			
			
		SCALE 1:1	
All dimensions are in mm. Tolerances according ISO 2768 c-K			
COMPONENTS	MATERIALS	PLATING ( $\mu\text{m}$ )	
Body Male center contact Female center contact Outer contact Insulator Gasket Substrate Resistor Others parts	<b>STAINLESS STEEL</b> <b>BERYLLIUM COPPER</b> <b>BERYLLIUM COPPER</b>  <b>PTFE</b> <b>SILICONE RUBBER</b> <b>ALUMINA</b> <b>THIN FILM</b>	<b>GOLD 2.5 OVER NICKEL 1</b> <b>GOLD 2.5 OVER NICKEL 1</b>	

PAGE 2/2	ISSUE 18-12-24A	SERIES ATTENUATOR	PART NUMBER <b>R429806101</b>																			
<b>ELECTRICAL CHARACTERISTICS</b>																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Frequency (GHz)</td><td><b>DC - 2</b></td><td><b>2 - 4</b></td><td><b>4 - 8</b></td><td><b>8 - 12.4</b></td><td><b>12.4 - 18</b></td></tr> <tr> <td>V.S.W.R (<math>\leq</math>)</td><td><b>1.1</b></td><td><b>1.15</b></td><td><b>1.2</b></td><td><b>1.25</b></td><td><b>1.35</b></td></tr> <tr> <td>Deviation(<math>\pm</math>dB)</td><td><b>0.3</b></td><td><b>0.3</b></td><td><b>0.3</b></td><td><b>0.3</b></td><td><b>0.3</b></td></tr> </table>					Frequency (GHz)	<b>DC - 2</b>	<b>2 - 4</b>	<b>4 - 8</b>	<b>8 - 12.4</b>	<b>12.4 - 18</b>	V.S.W.R ( $\leq$ )	<b>1.1</b>	<b>1.15</b>	<b>1.2</b>	<b>1.25</b>	<b>1.35</b>	Deviation( $\pm$ dB)	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>
Frequency (GHz)	<b>DC - 2</b>	<b>2 - 4</b>	<b>4 - 8</b>	<b>8 - 12.4</b>	<b>12.4 - 18</b>																	
V.S.W.R ( $\leq$ )	<b>1.1</b>	<b>1.15</b>	<b>1.2</b>	<b>1.25</b>	<b>1.35</b>																	
Deviation( $\pm$ dB)	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>																	
Operating Frequency Range		<b>DC - 18</b>		GHz																		
Impedance		<b>50</b>		$\Omega$																		
Nominal Attenuation		<b>6</b>		dB																		
Peak power at 25°C (1μs, 1%)		<b>100</b>		W																		
Average power at 25°C		<b>2</b>		W (Free Air Cooled)																		
				W (Conduction Cooled)																		
<b>MECHANICAL CHARACTERISTICS</b>																						
Connectors	<b>SMA</b>	Male Female		<b>MIL C39012</b>																		
Weight ( $\pm$ 15%)	<b>5.0900</b>	g																				
<b>ENVIRONMENTAL CHARACTERISTICS</b>																						
Operating temperature range			<b>4/400 K</b>																			
Storage temperature range			<b>-55/125</b>	°C																		
<b>Power derating Versus temperature</b>																						
																						
<b>SPECIFICATION</b>																						
<b>OTHER CHARACTERISTICS</b>																						
<b>For Cryogenic applications</b>																						