



PAGE 1/2	ISSUE 21-11-23A	SERIES SPLITTER	PART NUMBER <b>R434214000</b>
----------	--------------------	--------------------	-------------------------------

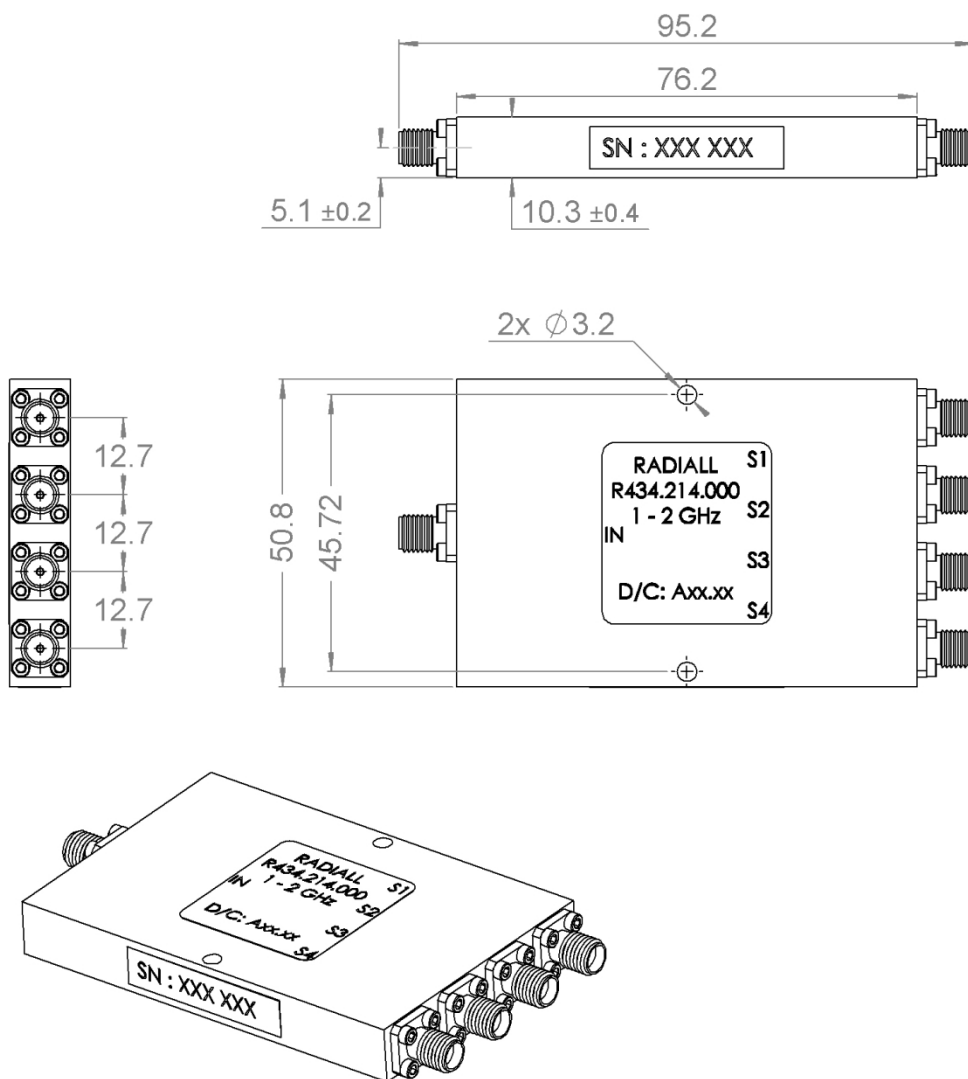

All dimensions are in mm. Tolerances according ISO 2768 c-K



Weight (±15%) **119,0000 g**  
Specification

PAGE 2/2

 ISSUE  
**21-11-23A**

 SERIES  
**SPLITTER**

 PART NUMBER **R434214000**

### ELECTICAL CHARACTERISTICS

Frequency range :	1 - 2 GHz
Number of ways	4
Phase	0°
VSWR	
Input	1.4
Output	1.4
Impedance	50 Ohms
Insertion loss	0.8 dB max
Isolation	23 dB mini
Amplitude balance	± 0.4 dB
Phase Balance	± 5°
Average Power	
VSWR load < 1.2	30W
VSWR load : inf	1W

### MECHANICAL CHARACTERISTICS

Connectors :	
Input	SMA female
Output	SMA female
Body	Aluminium
Finish	Blue Paint

### ENVIRONMENTAL CHARACTERISTICS

Operating temperature	-40 / +85 °C
Storage temperature	-55 / +125 °C