



PAGE 1/2	ISSUE 04-01-24A	SERIES SPLITTER	PART NUMBER R434513002
----------	--------------------	--------------------	-------------------------------

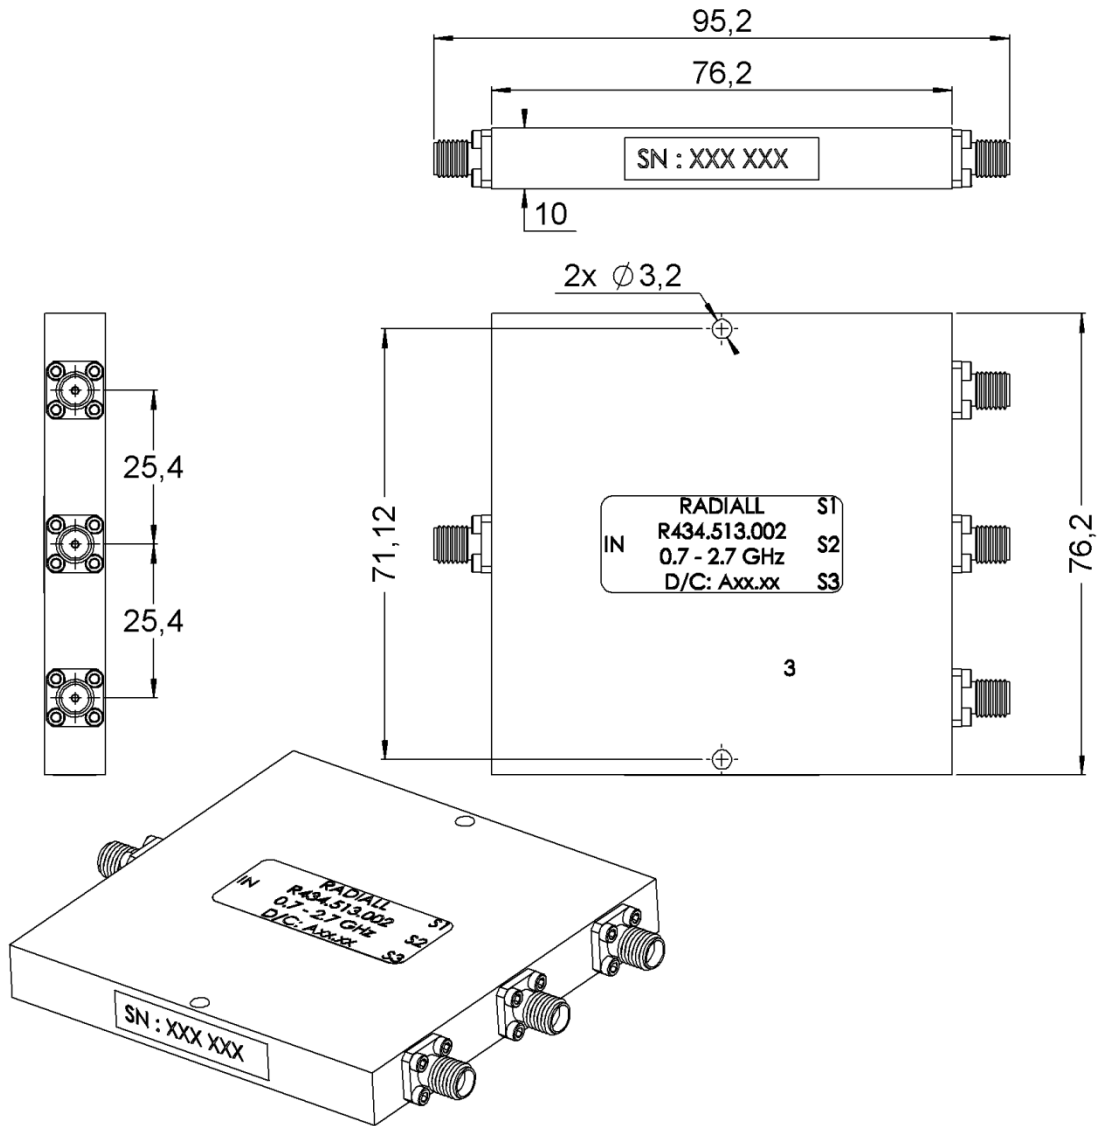

All dimensions are in mm. Tolerances according to ISO 2768 c-K



Weight (±15%) **159,6960 g**
Specification

PAGE 2/2	ISSUE 04-01-24A	SERIES SPLITTER	PART NUMBER R434513002
----------	---------------------------	---------------------------	-------------------------------

ELECTICAL CHARACTERISTICS

Frequency range :	0.7 – 2.7 GHz
Number of ways	3
Phase	0°
VSWR	
Input	1.5
Output	1.5
Impedance	50 Ohms
Insertion loss	0.6 dB max
Isolation	17 dB mini
Amplitude balance	± 0.5 dB
Phase Balance	± 8°
Average Power	
VSWR load < 1.2	30W
VSWR load : inf	1W

MECHANICAL CHARACTERISTICS

Connectors :	
Input	SMA female
Output	SMA female
Body	Aluminium
Finish	Blue Paint

ENVIRONMENTAL CHARACTERISTICS

Operating temperature	-40 / +85 °C
Storage temperature	-55 / +125 °C