



PAGE 1/2	ISSUE 19-08-22A	SERIES SMPMS-L	PART NUMBER R231L80000
----------	--------------------	----------------	------------------------

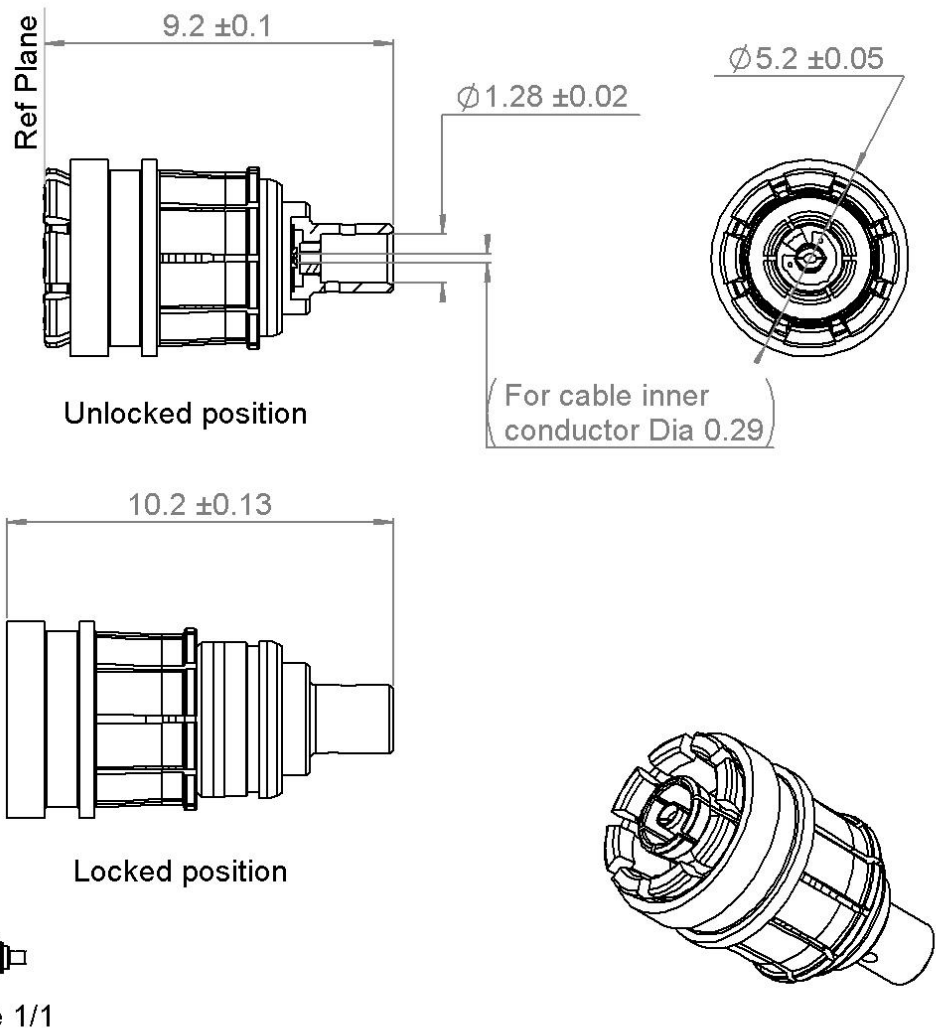

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	BERYLLIUM COPPER	N2PGR
Center contact	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL2
Outer contact	BERYLLIUM COPPER	N2PGR
Insulator	PTFE+PEEK	
Gasket	SILICONE, AG COND, 70 DURO	
Others parts	BRONZE,BERYLLIUM COPPER	NICKEL, GOLD
-	-	-
-	-	-

PAGE 2/2	ISSUE 19-08-22A	SERIES SMPMS-L	PART NUMBER R231L80000
-----------------	---------------------------	-----------------------	-------------------------------

PACKAGING

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-40	GHz
VSWR	* + 0,000	x F(GHz) Maxi
Insertion loss	0.02+0.12	√F(GHz) dB Maxi
RF leakage	- (**	- F(GHz)) dB Maxi
Voltage rating	125	Vrms Maxi
Dielectric withstanding voltage	250	Vrms mini
Insulation resistance	5000	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	6.7	N mini
Axial force – Opposite end	6.7	N mini
Torque	NA	N.cm mini

Recommended torque		
Mating	NA	N.cm
Panel nut	NA	N.cm
Clamp nut	NA	N.cm
A/F clamp nut	0,000	mm

Mating life	50	Cycles maxi
Weight	0,610	g Maxi

ENVIRONMENTAL

Operating temperature	-65/+165	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION

RAD-GEN-CONN-003
RAD-DET-CONN-008

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	7,000	3,000	2,300	0,000	0,000	0,000
		0	Maxi			

Assembly instruction:

Recommended cable(s)

047SC-2901

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	25	N mini
- torque	NA	N.cm

TOOLING

Part Number	Description	Hexagon
R282868400	LOCKING - UNLOCKING TOOL	
R282740070	ASSEMBLY SOLDER	

CUSTOMER'S APPROVAL

Department or
company's stamp

Name :

Date :

Copy to send back to
RADIALL S.A. BEFORE :

OTHER CHARACTERISTICS

*** 1.07 + 0.006 F5GHz) Maxi up to 40 GHz**
**** -70 dB up to 30 GHz**