

PAGE **1/2**

ISSUE **10-04-25**

SERIE : **SPnT**

PART NUMBER : **R574893400**

## RF CHARACTERISTICS

Number of ways : **4**  
 Frequency range : **0 - 40 GHz**  
 Impedance : **50 Ohms**

| Frequency (GHz)    | DC - 6         | 6 - 12.4       | 12.4 - 18      | 18 - 26.5      | 26.5 - 40      |
|--------------------|----------------|----------------|----------------|----------------|----------------|
| VSWR max           | <b>1.30</b>    | <b>1.40</b>    | <b>1.50</b>    | <b>1.70</b>    | <b>1.95</b>    |
| Insertion loss max | <b>0.20 dB</b> | <b>0.40 dB</b> | <b>0.50 dB</b> | <b>0.70 dB</b> | <b>1.00 dB</b> |
| Isolation min      | <b>80 dB</b>   | <b>70 dB</b>   | <b>70 dB</b>   | <b>60 dB</b>   | <b>55 dB</b>   |
| Average power (*)  | <b>40 W</b>    | <b>30 W</b>    | <b>25 W</b>    | <b>15 W</b>    | <b>5 W</b>     |

TERMINATION IMPEDANCE : **50 Ohms**  
 TERM. AVG. POWER AT 25° C : **1 W per termination / 3 W total power**

## ELECTRICAL CHARACTERISTICS

Actuator : **LATCHING**  
 Nominal current \*\* : **250 mA**  
 Actuator voltage (Vcc) : **28V (24 to 30V) / NEGATIVE COMMON**  
 Terminals : **solder pins (250°C max. / 30 sec.)**  
 Indicator rating : **1 W / 30 V / 100 mA**  
 Self cut-off time : **40 ms < CT < 120 ms**

## MECHANICAL CHARACTERISTICS

Connectors : **SMA 2.9 female per MIL-C 39012**  
 Life : **7 million cycles per position**  
 Switching Time\*\*\* : **< 40 ms**  
 Construction : **Splashproof**  
 Weight : **< 250 g**

## ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : **-40°C to +85°C**  
 Storage temperature range : **-55°C to +85°C**

(\*) Average power at 25°C per RF Path)  
 (\*\*) At 25° C ±10%)  
 (\*\*\*) Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 10-04-25

SERIE : SPnT

PART NUMBER : R574893400


DRAWING

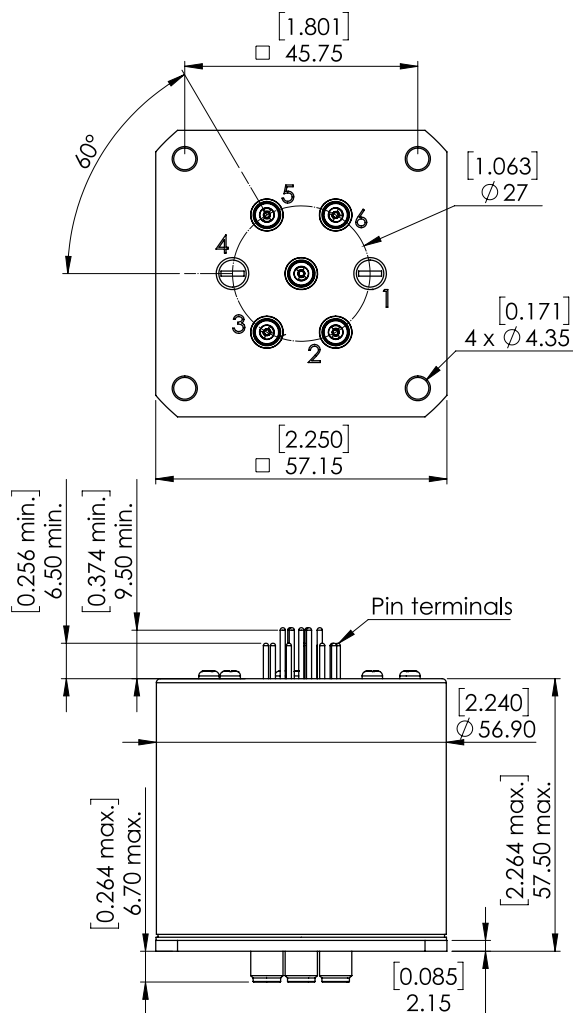

General tolerances : ±0,5 mm [0,02 in]

| Voltage | RF Continuity | Ind. |
|---------|---------------|------|
| -C +2   | IN ↔ 2        | D.H  |
| -C +3   | IN ↔ 3        | D.I  |
| -C +5   | IN ↔ 5        | D.E  |
| -C +6   | IN ↔ 6        | D.F  |

**LABEL**

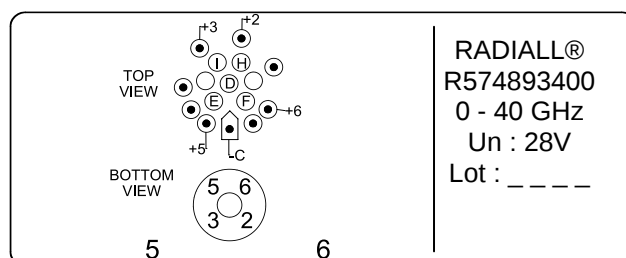

SCHEMATIC DIAGRAM

