




Series
NSX

SIZE 20HD CRIMP PIN CONTACT
CHROMEL
/

Issue:
JANUARY 29 2002

Page
1 / 1

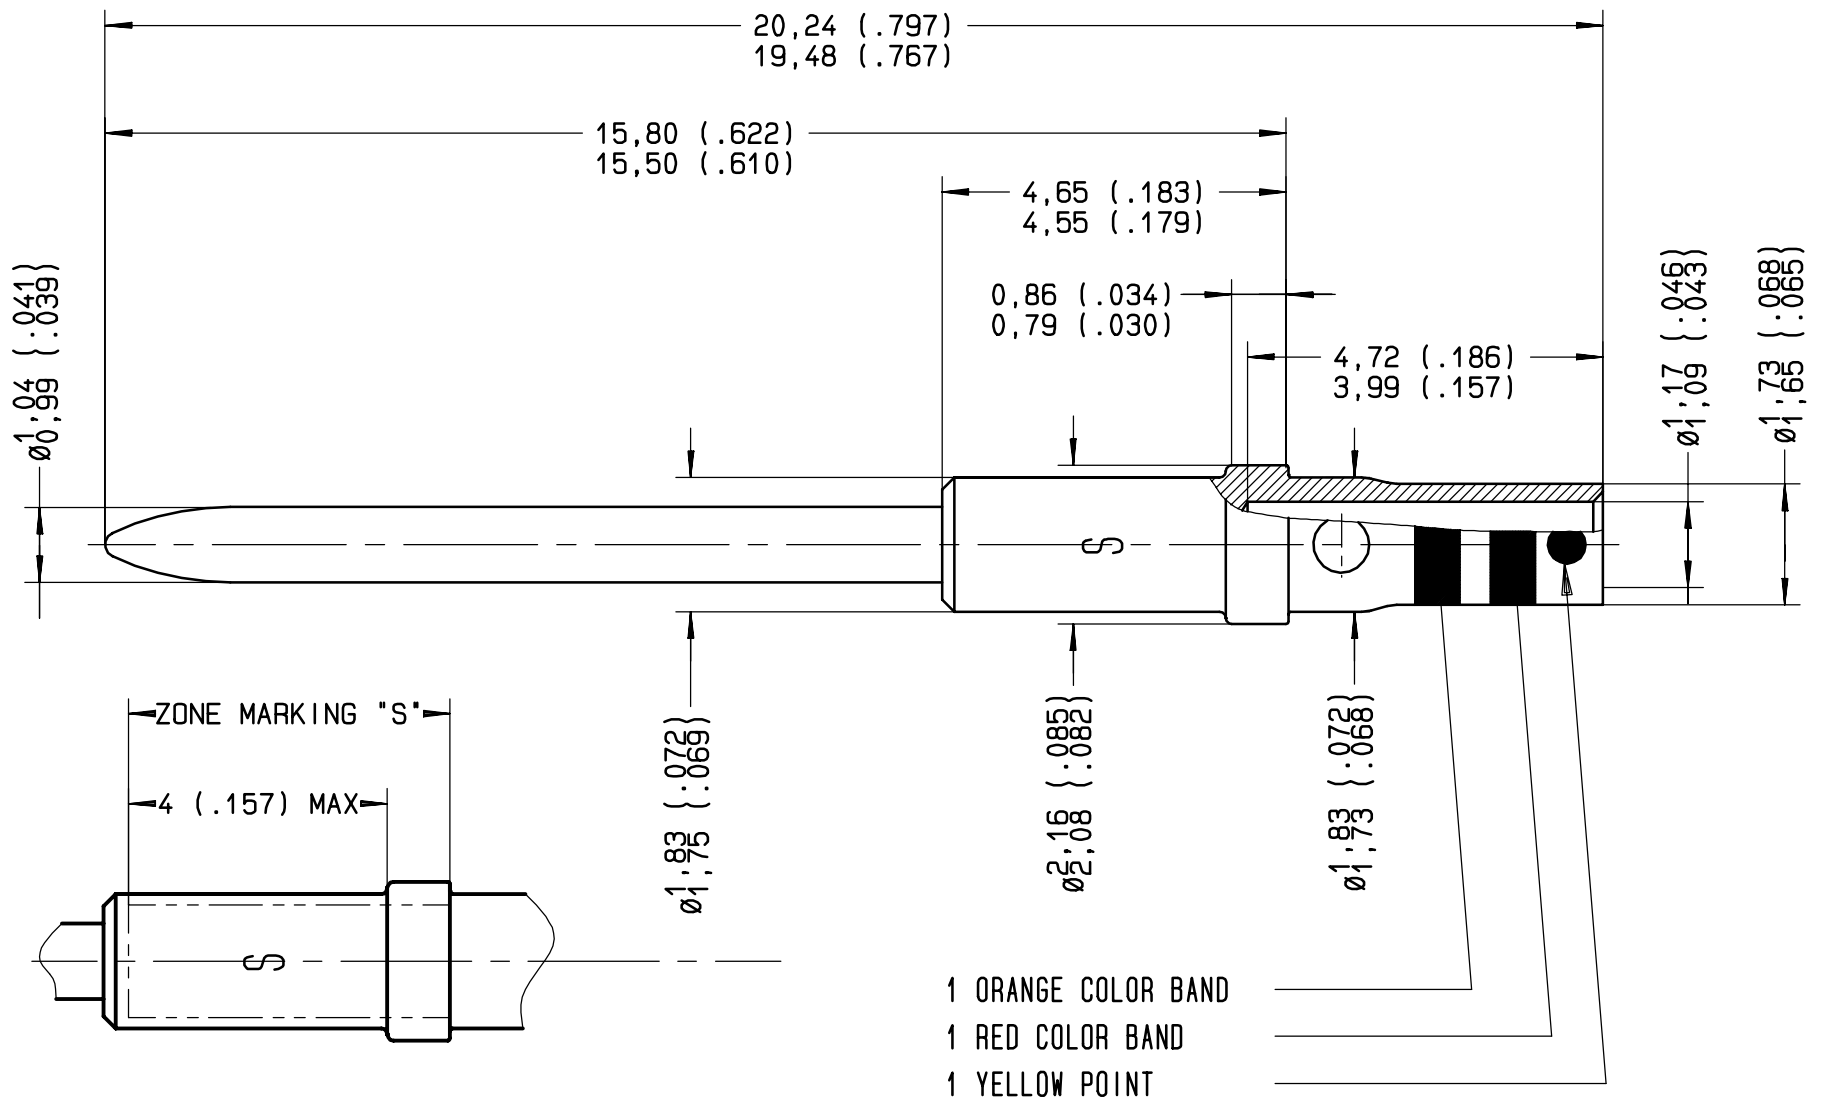

MATERIAL : CHROMEL

WIRES ACCOMODATED : AWG 20 22 24
INSULATION DIAMETER : .071 MAX
STRIP LENGTH : .158

TOOLING
CRIMPING TOOL : M22520/2-01 RADIALL 282 281
SELECTOR POSITION : 7 FOR AWG 20
6 FOR AWG 22
5 FOR AWG 24

POSITIONER : M22520/2-08 RADIALL 282 971
INSERTION TOOL : M81969/1-02 RADIALL 282 881
EXTRACTION TOOL : M81969/1-02 RADIALL 282 891

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610

CREATION
PEN: 90052
NOM: FATELLI
DATE: 24-09-90
APPR.: .	JAN 29 02	REDRAWN; ADD ZONE MARKING "S"	COUTHON	GOMBERT
	Issue	Revisions	Name	Approved

RADIALL[®]

101, rue Philibert Hoffmann Z.I. Ouest
93116 ROSNY/BOIS Cedex (France)
Tl.: 01 49 35 35 35
Fax.: 01 48 54 63 63
Tlax: RADIA 235220