


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

PROPRIETARY INFORMATION
 NOT TO BE RELEASED
 WITHOUT WRITTEN PERMISSION
 FROM AN AUTHORIZED
 REPRESENTATIVE OF
 APPLIED ENGINEERING PRODUCTS.

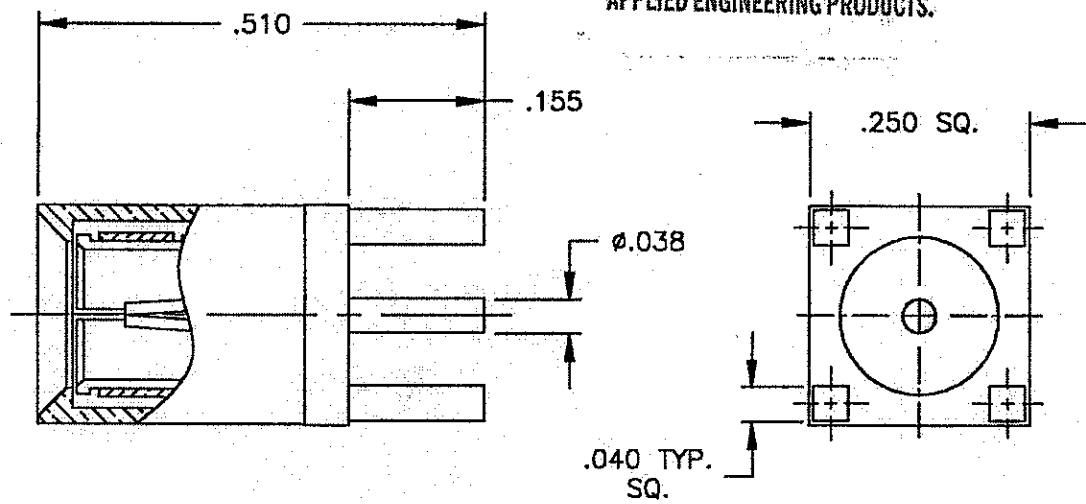

NOTES:

MATERIAL:

1. BODY & SLEEVE = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
2. CONTACT & SPRING = BERYLLIUM COPPER PER ASTM B196, ALLOY C173000, TEMPER TD04.
3. INSULATOR = TEFLON, PER ASTM D1710, GRADE 1, TYPE II, CLASS A.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 - .0002 THK. OVER .00005 - .0001 THK. COPPER PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
TOLERANCES ON		
FRAC.	DECIMAL	ANGLES
1/64		± 2°
MATERIAL:		
SEE NOTES		

DRAWN	DATE
D.N.	11-24-97
CHECKED	DATE
<i>[Signature]</i>	11/24/97
APPROVED	DATE
<i>[Signature]</i>	11/24/97
FINISH:	
SEE NOTES	

APPLIED ENGINEERING PRODUCTS		
104 John W. Murphy Drive, P.O. Box 510 New Haven, CT 06513		
75 ohm AIR DIELECTRIC STRAIGHT SLIDE-ON FEMALE PRINTED CIRCUIT MOUNT		
SIZE	CODE IDENT NO.	
A	19505	8631-7511-005
SCALE	5:1	SHEET 1 OF 1

Design Products Co. Clearprint #1000H