


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/01/09	M.J.



NOTES:

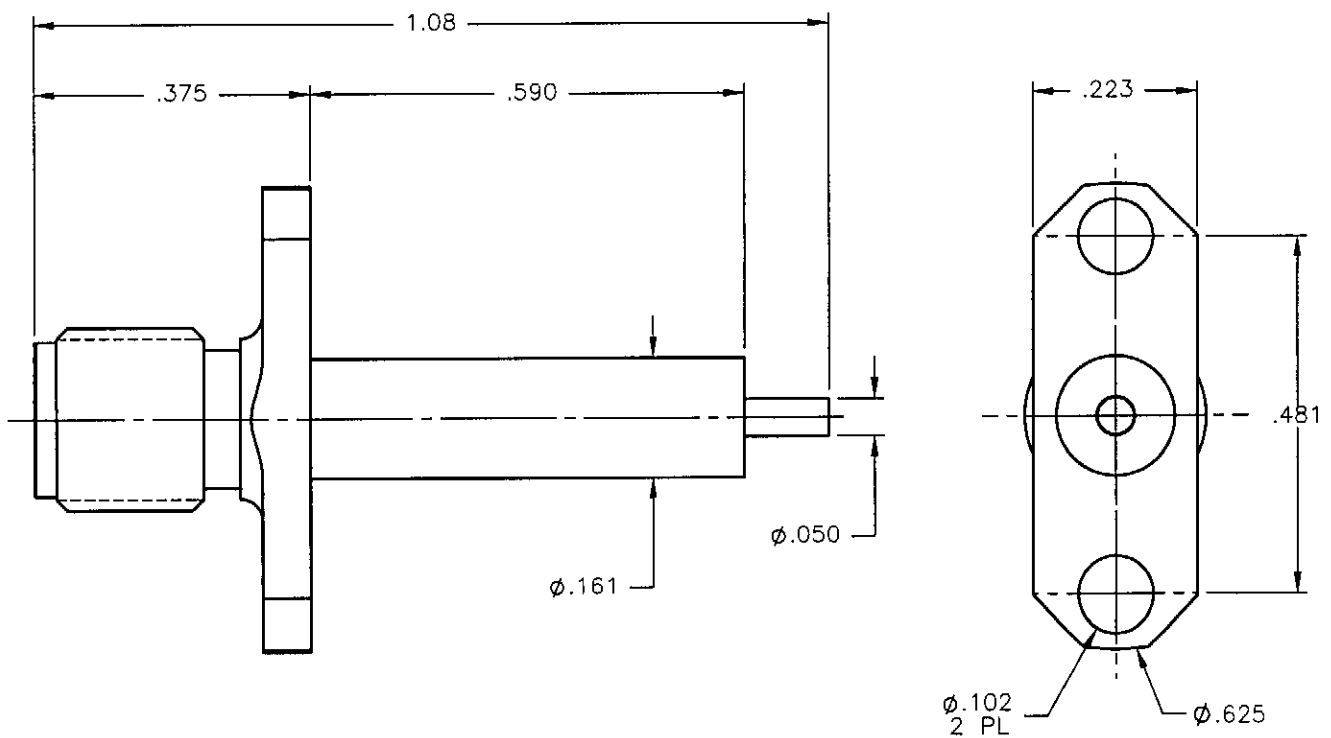

MATERIALS:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY = PASSIVATE PER QQ-P-35, TYPE VI.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

Property of Radiall Incorporated
 This document cannot be reproduced or
 communicated to a third party without prior
 written permission of RADIALL Incorporated.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 APPLIED ENGINEERING PRODUCTS a RADIALL company 104 John W. Murphy Dr. New Haven, CT 06513
	M.J.	06/01/09	
DECIMAL	ANGLE	CHKD:	SMA STRAIGHT JACK 2 HOLE FLANGE MOUNT RECEPTACLE SOLID CONTACT
		D.N.	
		APVD:	SIZE FSCM NO. DWG NO. REV A 19505 9008-9213-000 A
REFERENCE:	MATERIALS & FINISHES:		SCALE 4:1 THIRD ANGLE PROJECTION  SHEET 1 OF 1
ORIGINATED: M.J. DATE: 06/01/09	SEE NOTES		

9008-9213-000