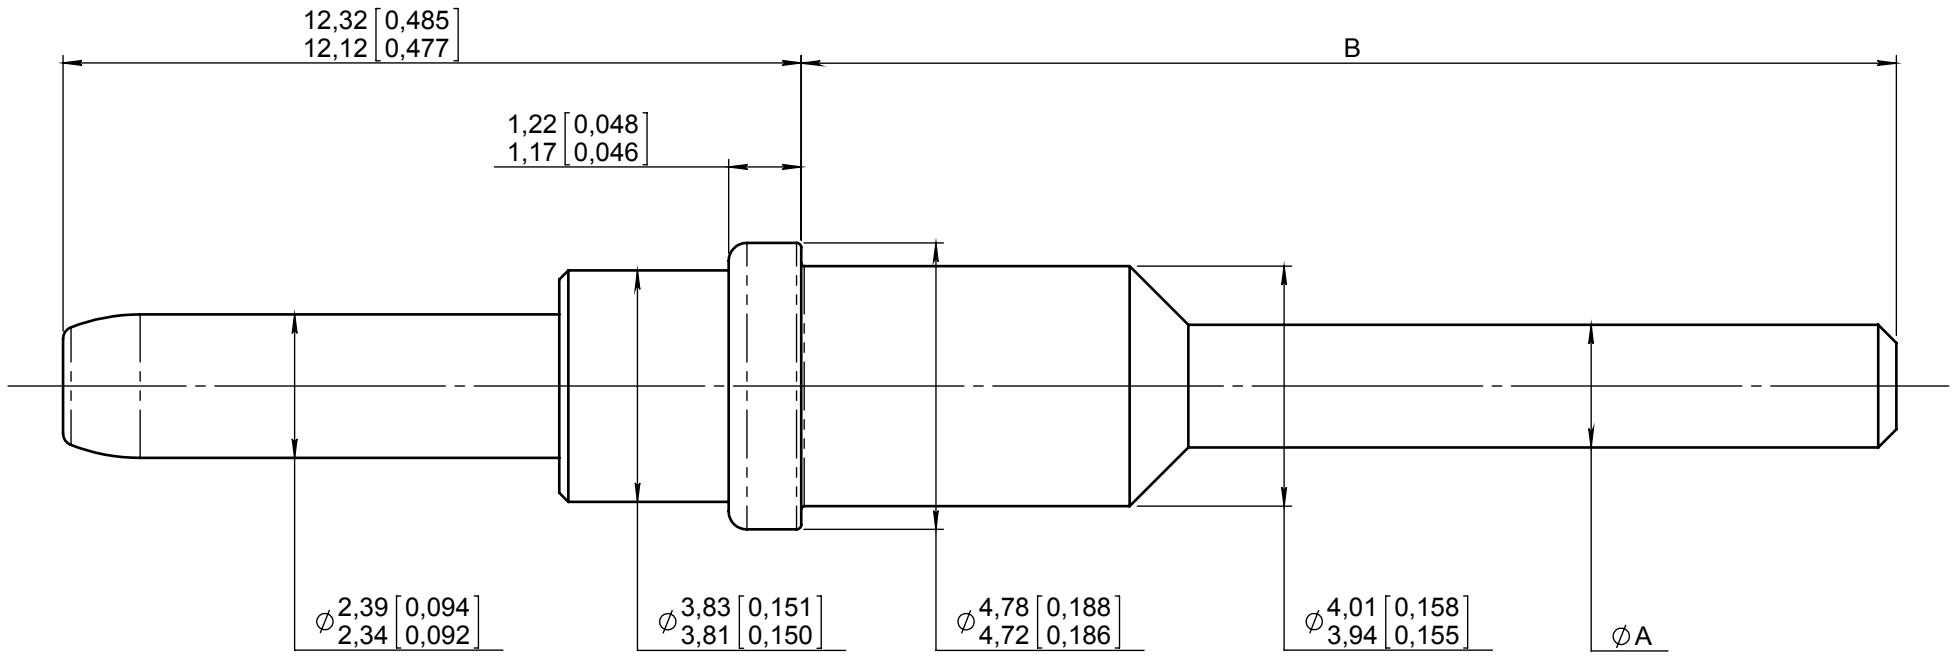


Series
EPXB

 SIZE 12 PC TAIL PIN CONTACTS
REAR RELEASE, REAR REMOVABLE

 Issue:
Mar. 18, 2013

 Page
1/1


	CONTACTS P/N	TYPE	ØA		B	
			BEFORE TINNING	AFTER TINNING	BEFORE TINNING	AFTER TINNING
NOT TINNED	617 259 005	YA		NA		NA
TIN LEADED	617 259 705	ZA	Ø2,07 (.081)		13,05 (.514)	
ROHS TINNED	617 259 505	RA	Ø2,00 (.079)	2,20 MAX (.087)	12,85 (.506)	13,55 MAX (.533)
NOT TINNED	617 259 006	YB		NA		NA
TIN LEADED	617 259 706	ZB	Ø2,07 (.081)		16,30 (.642)	
ROHS TINNED	617 259 506	RB	Ø2,00 (.079)	2,20 MAX (.087)	16,10 (.634)	16,80 MAX (.661)
NOT TINNED	617 259 003	YC		NA		NA
TIN LEADED	617 259 703	ZC	Ø2,07 (.081)		18,20 (.717)	
ROHS TINNED	617 259 503	RC	Ø2,00 (.079)	2,20 MAX (.087)	18,00 (.709)	18,70 MAX (.736)
NOT TINNED	617 259 007	YD		NA		NA
TIN LEADED	617 259 707	ZD	Ø2,07 (.081)		22,05 (.868)	
ROHS TINNED	617 259 507	RD	Ø2,00 (.079)	2,20 MAX (.087)	21,85 (.860)	22,55 MAX (.888)


MATERIAL & FINISHES :

- BODY : Copper alloy ; Gold over nickel plated.

INSERTION / EXTRACTION TOOL :

- M81969/28-02 (RADIAL P/N 282 885)

DIMENSIONS : mm (inch are given for information only)



CREATION				
PEN:				
NOM: VIEIRA D.				
DATE: Mar. 18, 2013				
APPR.: LE GLOAHEC Y	Issue	Revisions	Name	Approved