


Series
NSX

ENVIRONMENTAL SIZE 8 QUADRAX SOCKET CONTACT FOR
GORE CABLE P/N: RCN8487-1 (JSFY18)


Issue:
Sept. 11, 2012

Page
1/1

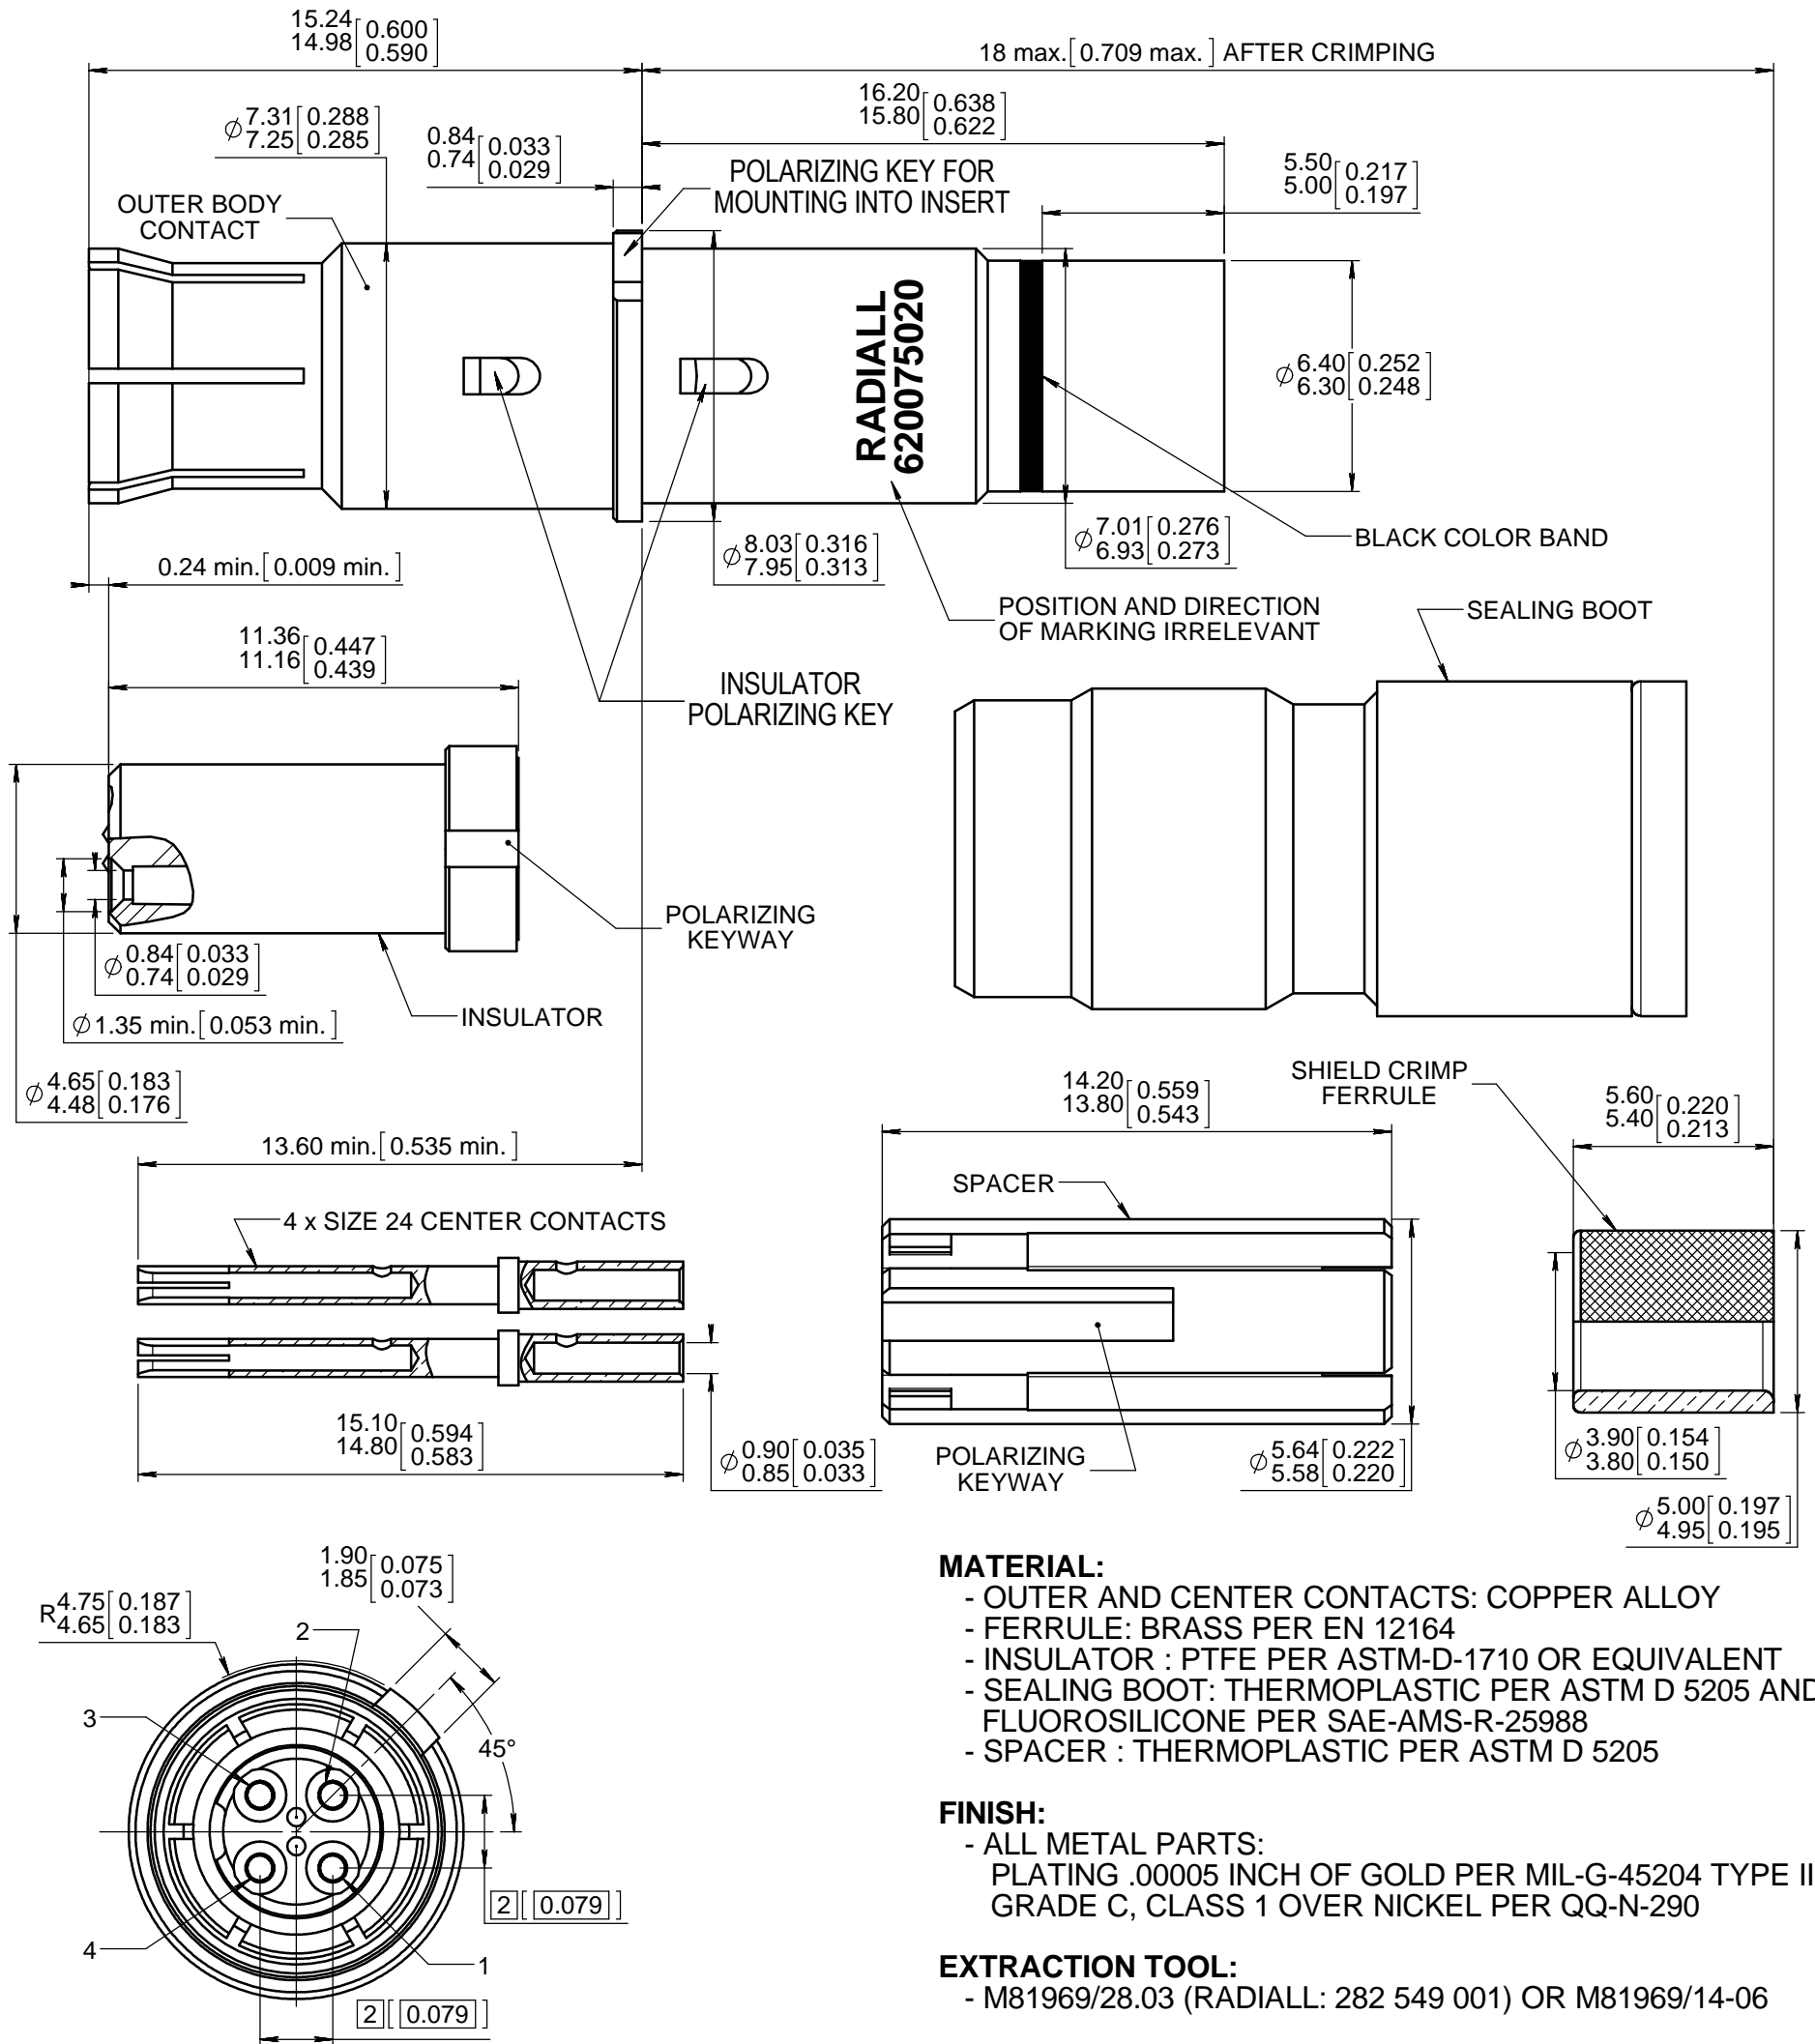

ENGAGING FACE

DIMENSIONS : mm (inch are given for information only)



MATERIAL:

- OUTER AND CENTER CONTACTS: COPPER ALLOY
- FERRULE: BRASS PER EN 12164
- INSULATOR : PTFE PER ASTM-D-1710 OR EQUIVALENT
- SEALING BOOT: THERMOPLASTIC PER ASTM D 5205 AND FLUOROSILICONE PER SAE-AMS-R-25988
- SPACER : THERMOPLASTIC PER ASTM D 5205

FINISH:

- ALL METAL PARTS:
PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE II GRADE C, CLASS 1 OVER NICKEL PER QQ-N-290

EXTRACTION TOOL:

- M81969/28.03 (RADIALL: 282 549 001) OR M81969/14-06

WIRING INSTRUCTIONS: SEE RP55178

PACKAGING : RADIALL - DATE CODE
620075020

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN: M040400089A	Sept. 11, 12	Added nota about marking direction & position	Legendre T.	Dupuis V.
NOM: ARNAULT F.	Oct. 31, 07	CORRECTED WIRING INSTRUCTION NUMBER	LEGENBRE	PESSARD
DATE: June 17, 2005	29 SEPT 06	UPDATED DIMENSIONS AND WIRING INSTRUCTION	MACARI	LEGENBRE
APPR.: LAHOREAU C.	16 AUG.05	ENVIRONMENTAL CT WAS NON ENVIRONMENTAL	MACARI	LEGENBRE
	Issue	Revisions	Name	Approved