


Series
NSX

SIZE 8 QUADRAX SOCKET CONTACT
FOR QUADRAX TENSOLITE NF24Q100 (BMS13-72T03C04G024), ECS 422404
PIC E51424 AND THERMAX MX100Q24 CABLES


Issue:
Nov. 02, 2015

Page
1/1

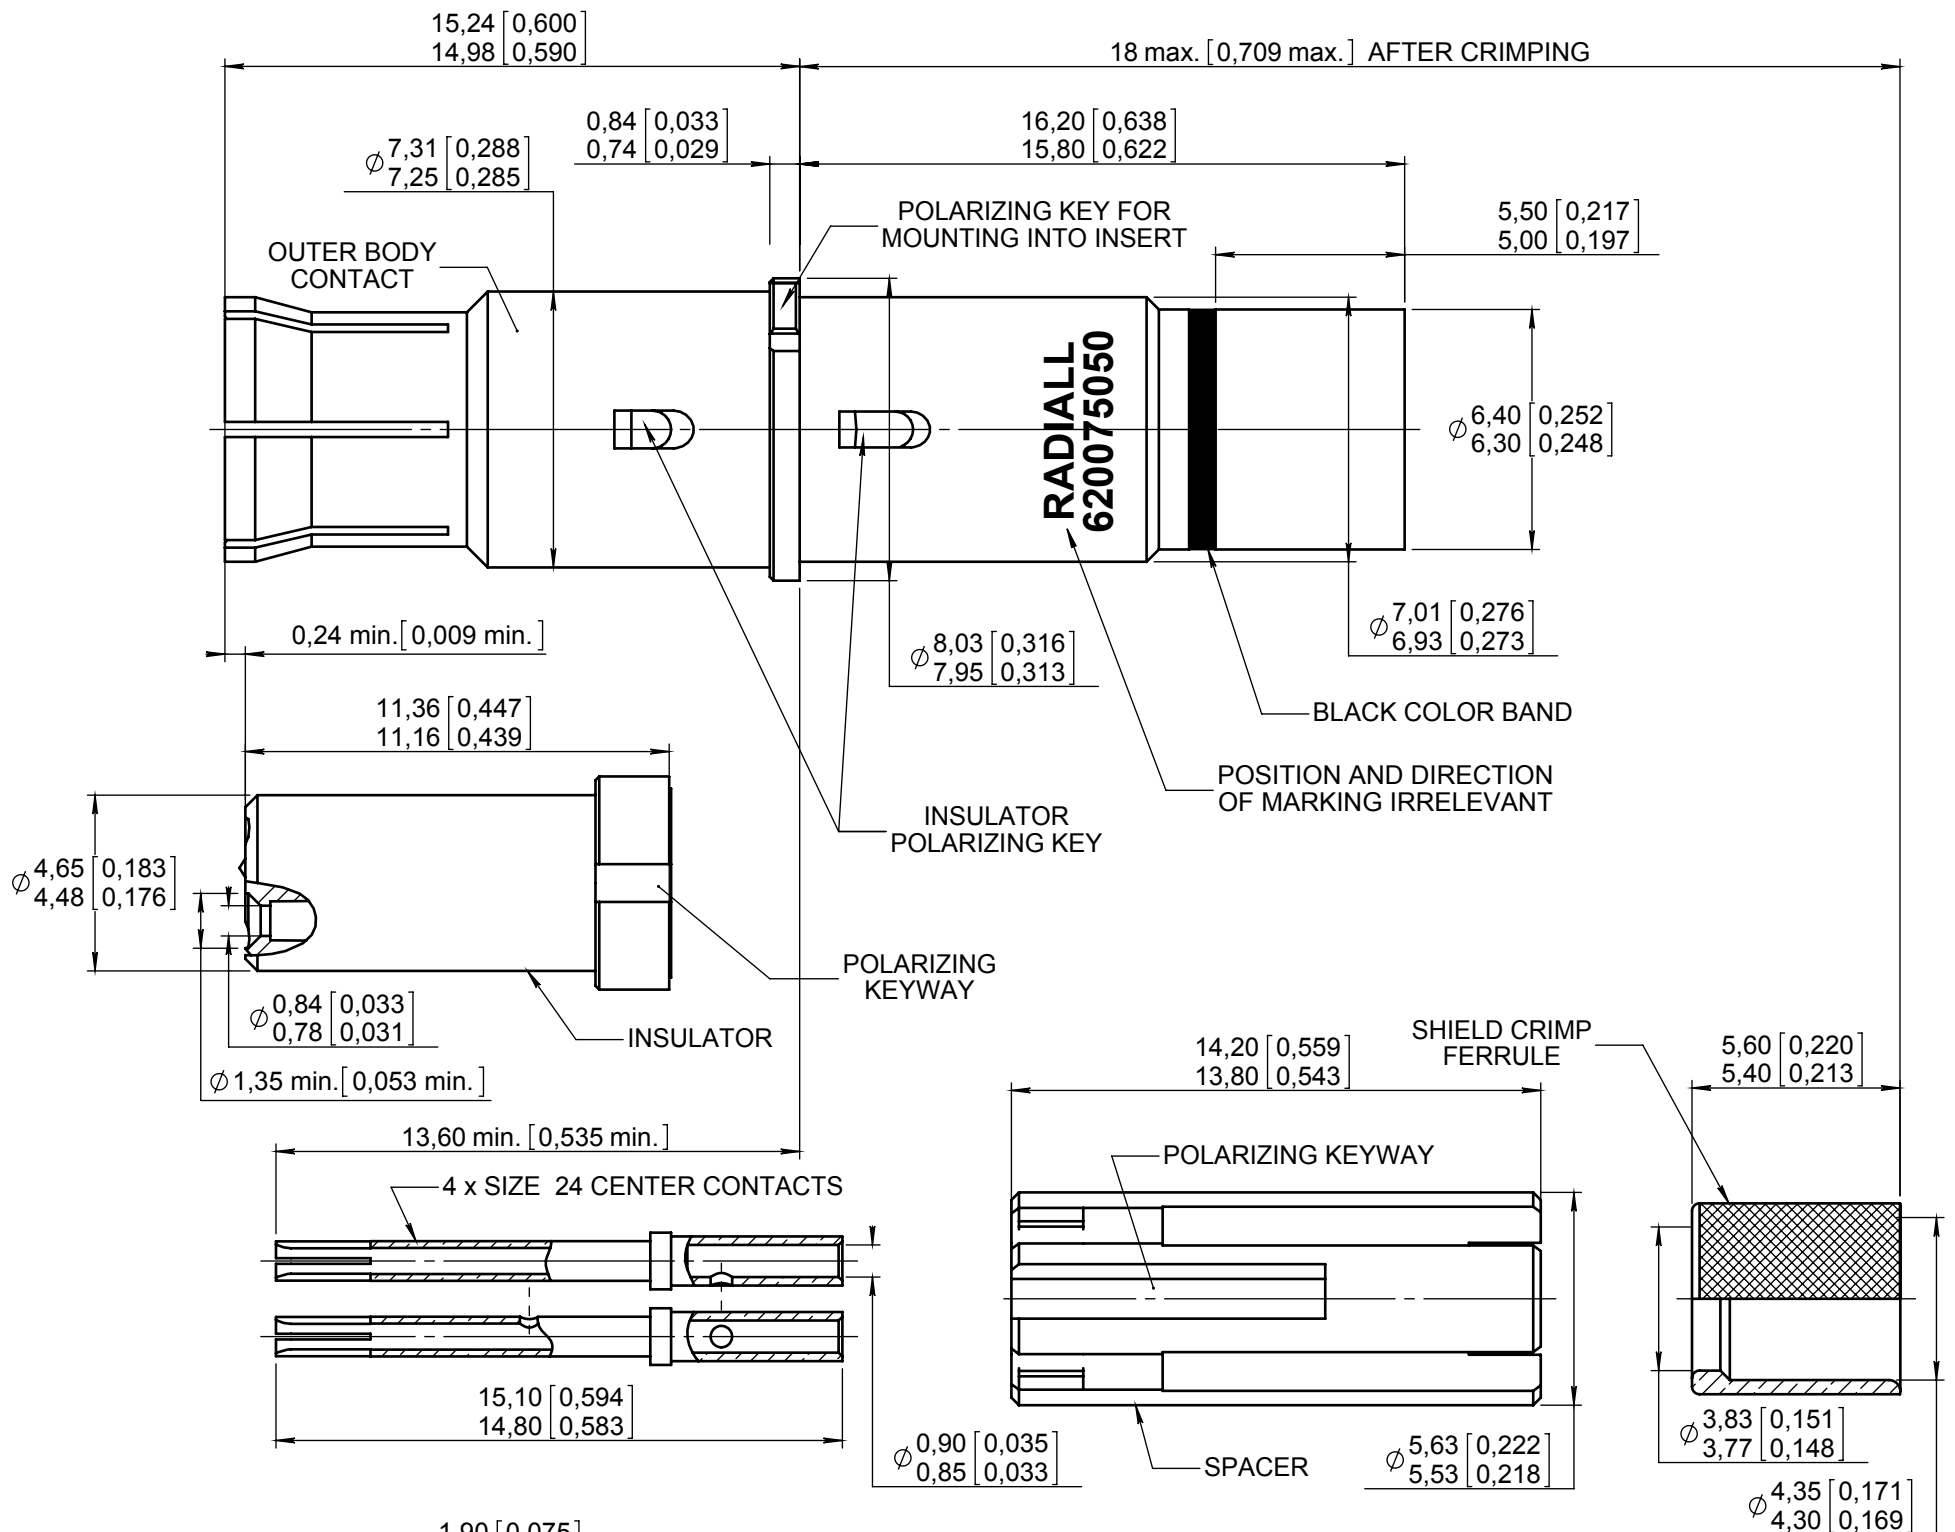

ENGAGING FACE

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 4.2 g

MATERIAL:

- OUTER AND CENTER CONTACTS: COPPER ALLOY
- FERRULE: BRASS PER QQ-B-626
- INSULATOR : PTFE PER ASTM-D-1710 OR EQUIVALENT
- SPACER : THERMOPLASTIC PER ASTM D 5205

FINISH:

- ALL METAL PARTS:
PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II
GRADE C OR D CLASS 1 OVER NICKEL PER QQ-N-290

EXTRACTION TOOL:

- M81969/28.03 (RADIALL: 282 549 001) OR M81969/14-06

WIRING INSTRUCTIONS: SEE RP57339.

Confidential information not to be disclosed to third parties without Radiall approval. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION	DATE	DESCRIPTION	NAME	APPROVED
	Nov. 02, 15	Corrected spacer diameter	Branjonneau V.	Legendre T.
PEN: M030400018E	Sept. 04, 15	Add PIC E51424 cable	Pécault B.	Legendre T.
	Sept. 05, 12	Updated way of marking	Legendre	Dupuis
NOM: LEGENDRE	Feb. 22, 12	Add BMS13-72T03C04G024 cable	Moutault	Dupuis
DATE: NOV. 19, 2003	June 08, 09	Added ECS and Thermax cables	MACARI	LEGENDRE
APPR.: LAHOREAU C.	July. 21, 05	Error corrected for spacer's material	LEGENDRE	LAHOREAU
	Issue	Revisions	Name	Approved

620075050EN

RADIALL PROPRIETARY INFORMATION