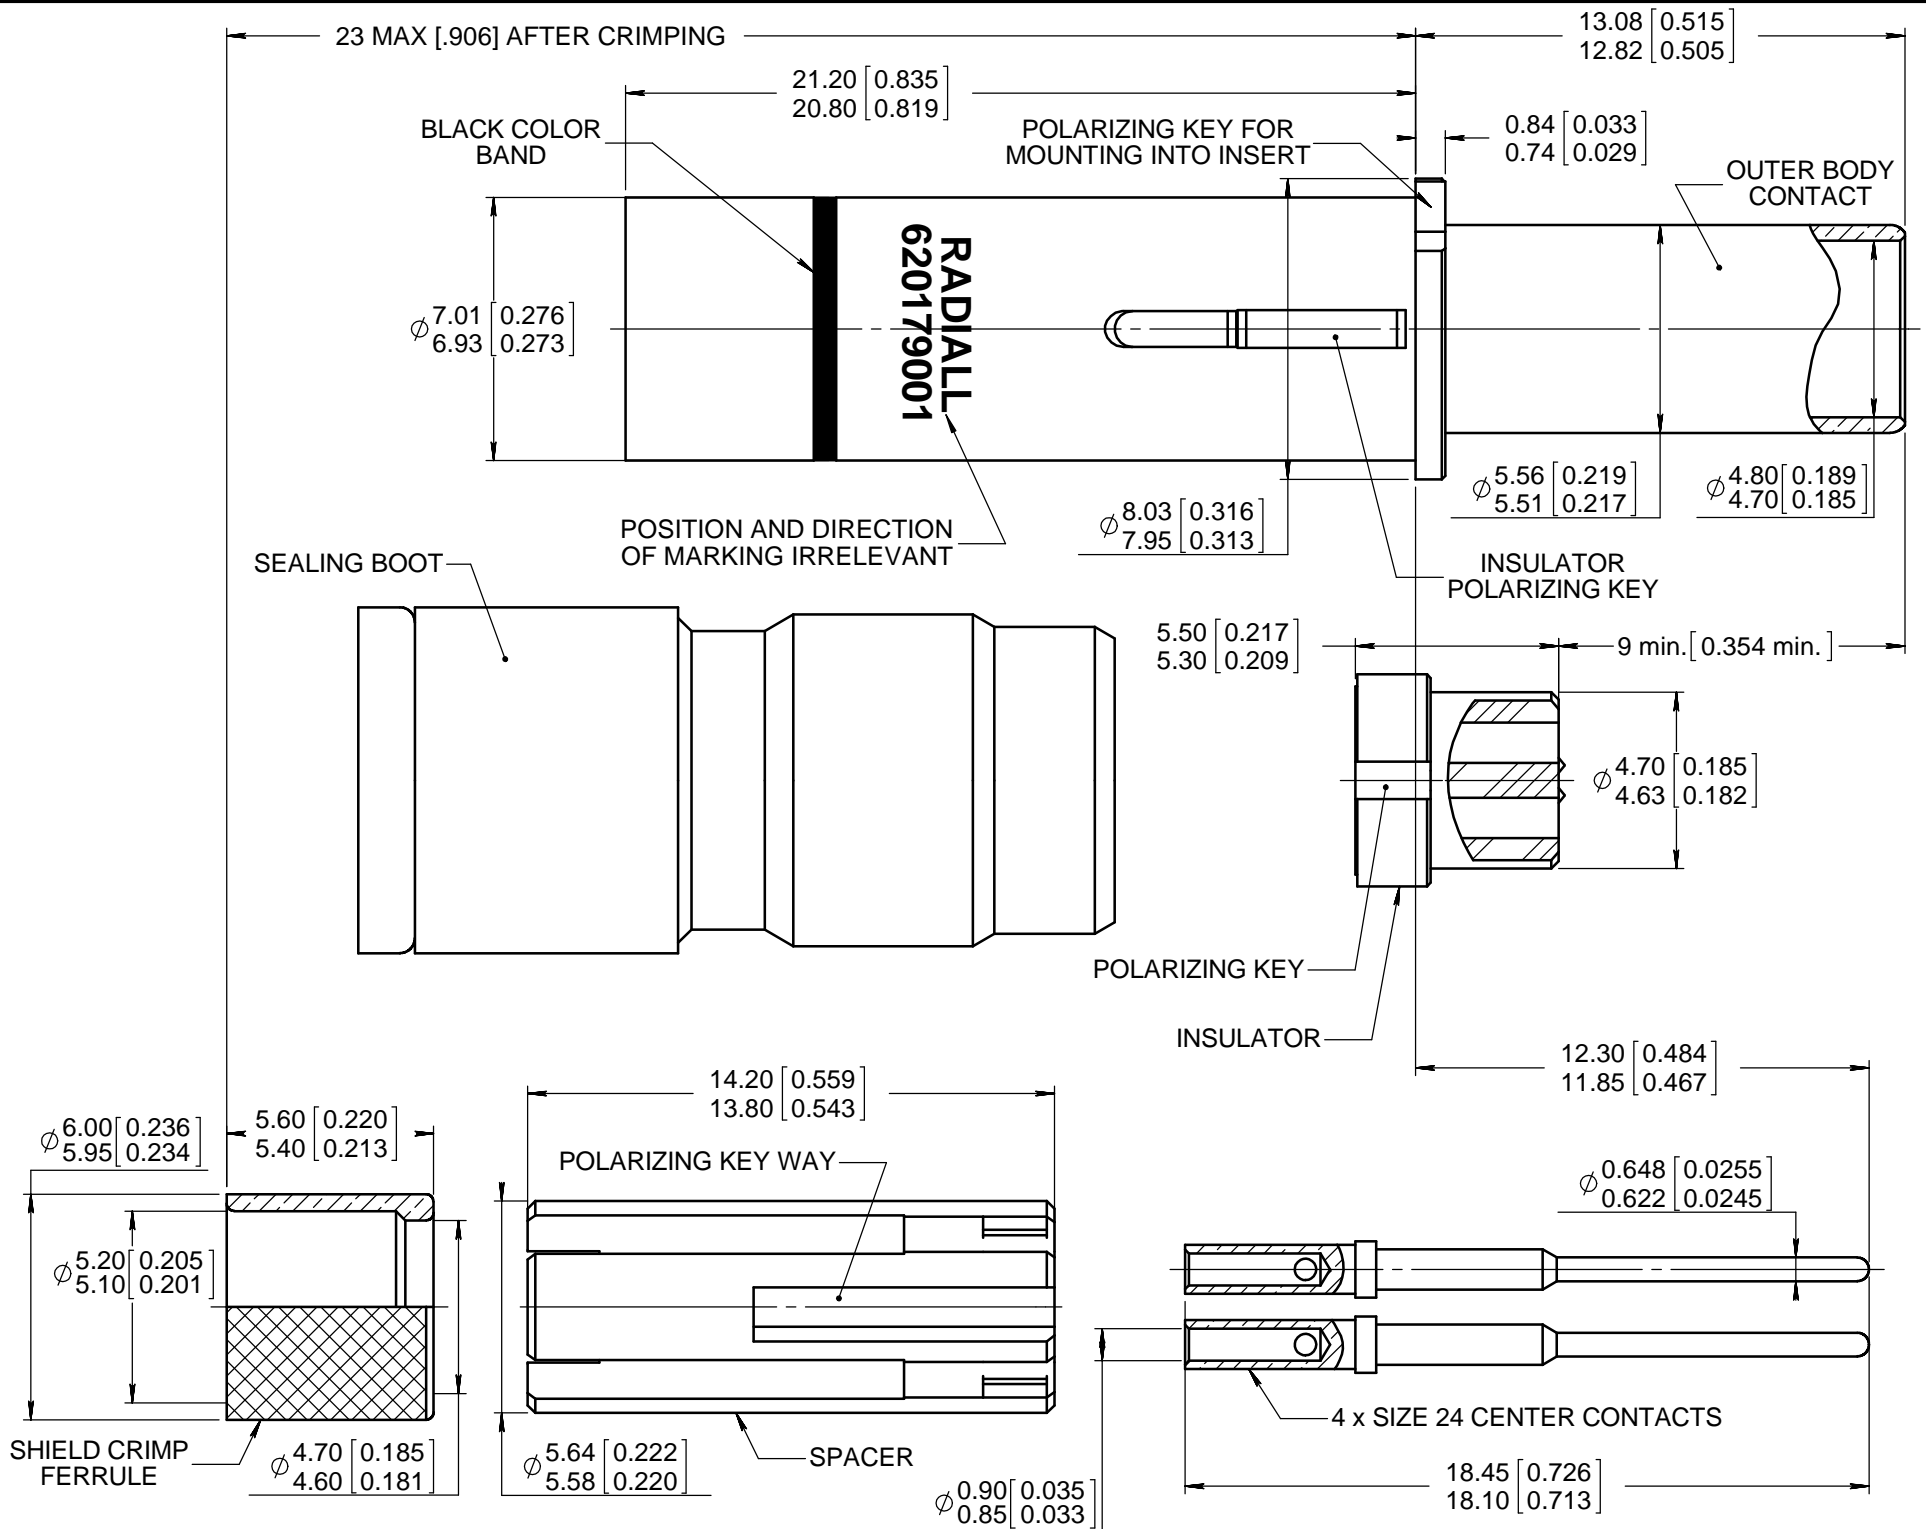


**Series
NSX**
**ENVIRONMENTAL SIZE 8 QUADRAX PIN CONTACT
FOR JSFY02 QUADRAX CABLE**
**Issue:
Sept. 05, 2012**
**Page
1/1**

MATERIAL:

- OUTER, CENTER CONTACTS AND FERRULE : COPPER ALLOY
- INSULATOR : PTFE PER ASTM-D-1710 OR EQUIVALENT
- SEALING BOOT: THERMOPLASTIC PER ASTM D 5205 AND FLUOROSILICONE PER SAE-AMS-R-25988
- SPACER : THERMOPLASTIC PER ASTM D 5205

FINISH:


- ALL METAL PARTS:
PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1 OVER NICKEL PER QQ-N-290

EXTRACTION TOOL:

- M81969/28.03 (RADIALL: 282 549 001) OR M81969/14-06

WIRING INSTRUCTIONS: SEE RP57186

PACKAGING: RADIALL - CAGE CODE
620179001

DIMENSIONS : mm (inch are given for information only)


Estimated weight : . g

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication in the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN: M030400075B				
	Sept. 05, 12	Updated way of marking	Legendre T.	Dupuis V.
NOM: MACARI JP.	June 17, 05	Updated materials	Arnault F.	Lahoreau C.
DATE: April 26, 2004	June 10, 04	Environmental was Nonenvironmental	Macari JP.	Mondot JC.
APPR.: MONDOT JC.	May 03, 04	Copper alloy was brass per QQ-B-626	Legendre T.	Macari JP.
	Issue	Revisions	Name	Approved