




Series
NSX

SIZE 16 CRIMP REMOVABLE PIN CONTACT

Issue:
JANUARY 25 2002

Page
1 / 1

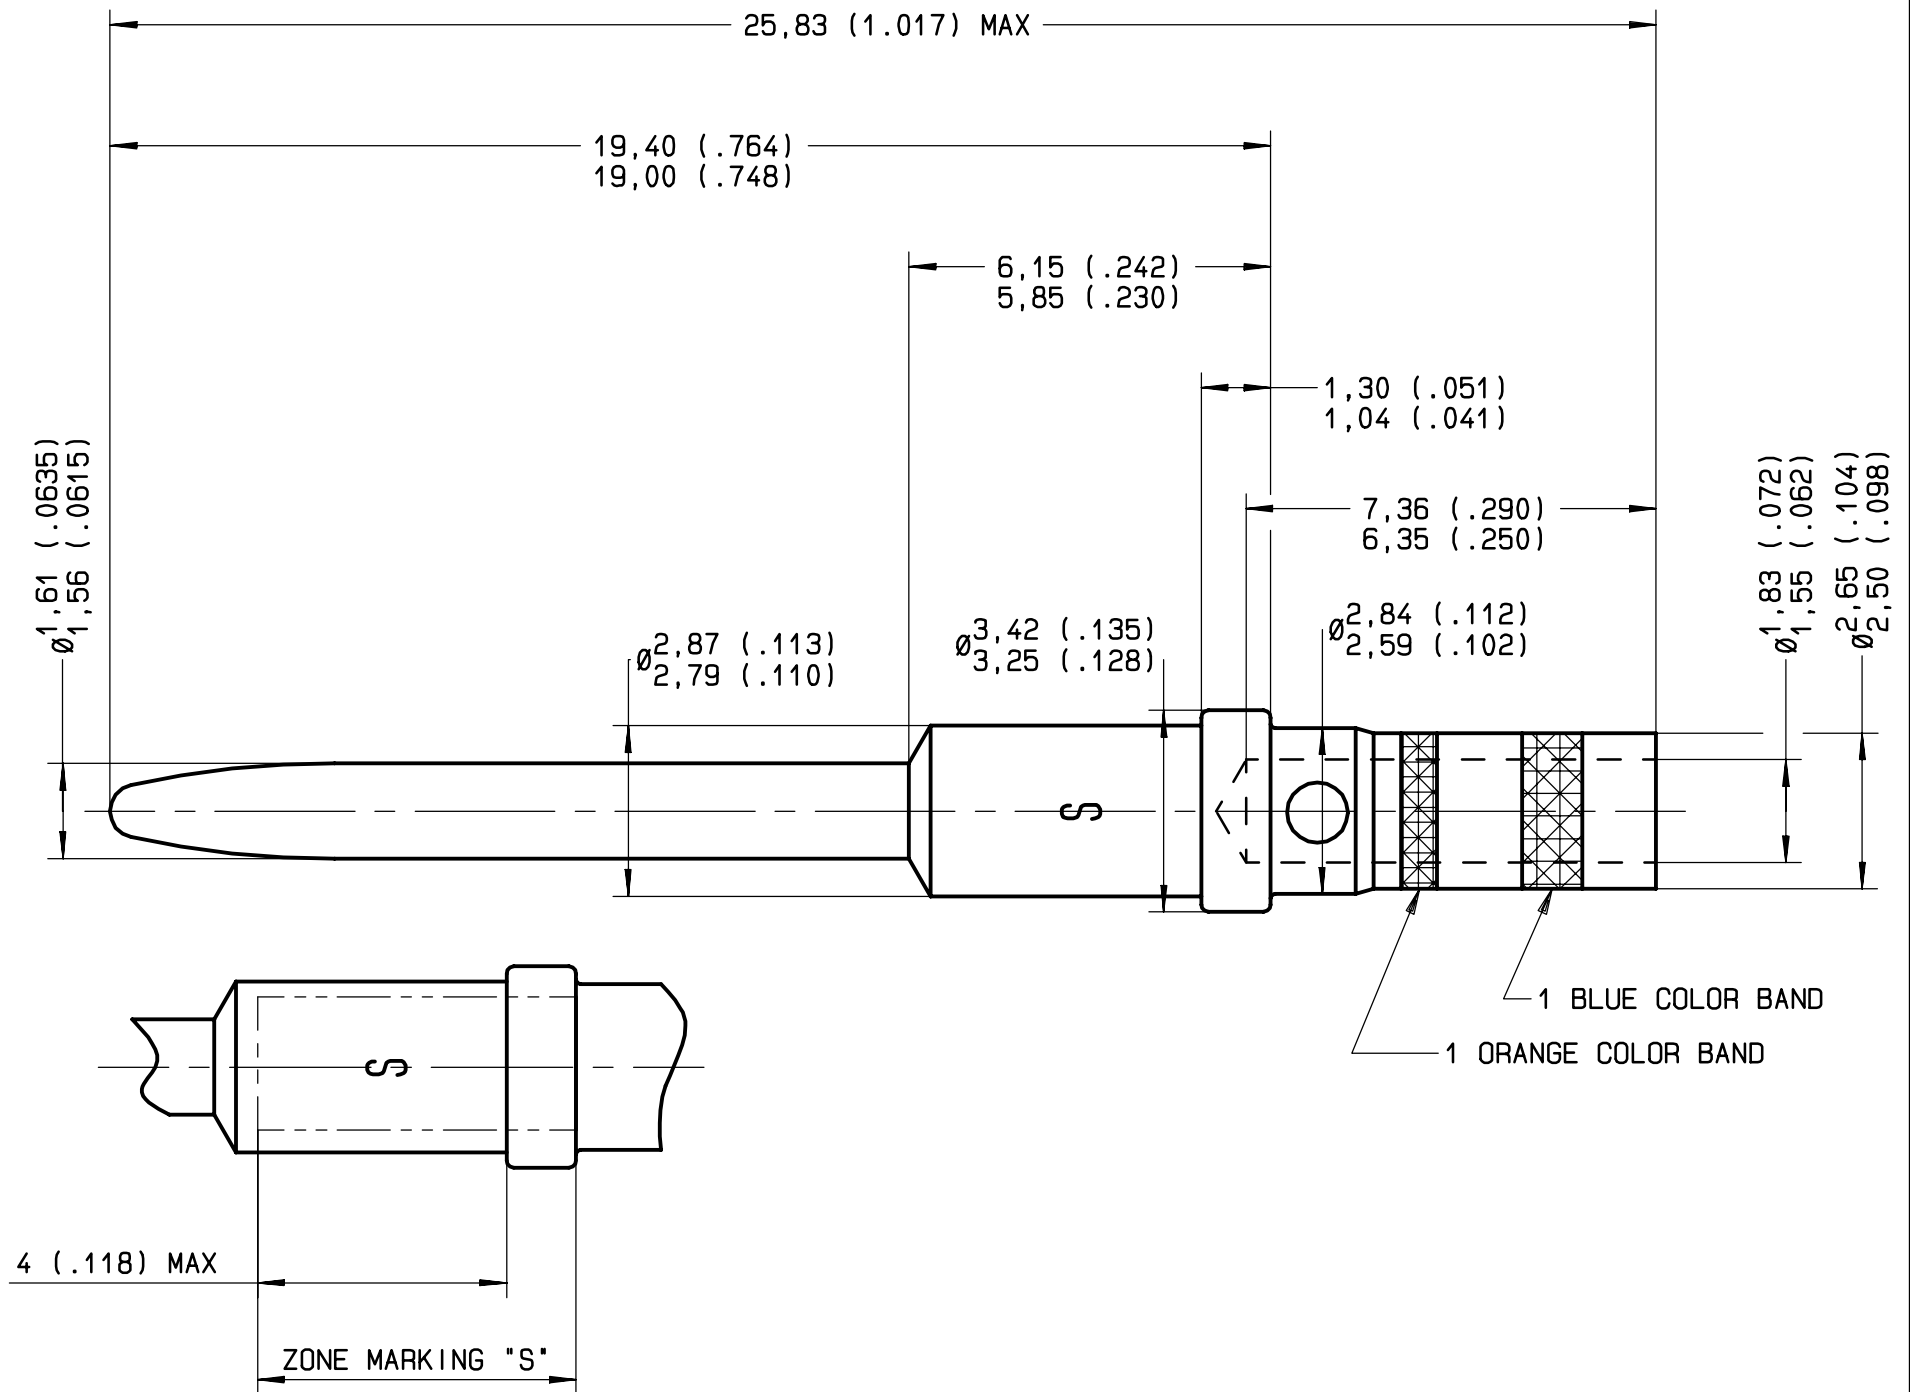

MATERIAL AND FINISH :
COPPER ALLOY - GOLD OVER NICKEL

WIRES ACCOMMODATED : AWG 16-18-20
INSULATION DIAMETER : .130 MAX
STRIP LENGTH : .236

TOOLING
CRIMPING TOOL : M22520/1-01 RADIALL 282 291
SELECTOR POSITION : 6 FOR AWG 16
5 FOR AWG 18
4 FOR AWG 20

POSITIONER : M22520/1-02 RADIALL 282 972
INSERTION AND EXTRACTION TOOL : M81969/1-03 RADIALL 282 546

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9311

CREATION				
PEN: .				
NOM: L FALETTI	JAN 25 02	ADD ZONE MARKING 'S'	COUTHON	GOMBERT
DATE: 27 APR 83	12 APR 96	SELECTOR POSITION MODIFIED DIMENSIONS MODIFIED ACCORDING TO ARINC 600	VALGRESY	BALDYROU
APPR.:	05 APR 96	REDRAWN	VALGRESY	BALDYROU
	Issue	Revisions	Name	Approved

A620230