


TECHNICAL DATA SHEET

620946015

ENVIRONMENTAL REAR RELEASE, REAR REMOVABLE PIN QUADRAX SIZE 8 CAVITY REDUCER Series FOR ML OR MT LuxCis OPTICAL CONTACT NSX

Issue: Nov. 24, 2017 Page 1/1

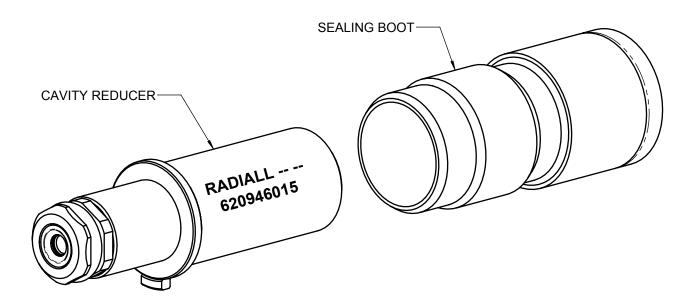

MATERIAL:

- BODY: BRASS PER SAE-C 38500
- CLIP : BERYLLIUM COPPER PER ASTM B 194-01 SLEEVE HOLDER : BRASS PER SAE-C 38500
- ALIGNMENT SLEEVE : PHOSPHOR BRONZE PER ASTM B139/B139 M-01 "O" RING AND SEALING SLEEVE : FLUOROSILICONE PER SAE AMS-R-25988
- SEALING BOOT : HIGH GRADE THERMOPLASTIC PER ASTM D 5205

FINISH:

- BODY AND SLEEVE HOLDER: ELECTRODEPOSITED NICKEL PER SAE-AMS-QQ-N-290

NOTES:

- SLEEVE HOLDER CAN BE REMOVING WITH A TUBULAR HEXAGON BOX SPANNER ACROSS FLATS OF 5 [.197]
- COUPLING TORQUE : 0,25 N.m ± 5% CAN BE ORDERED SEPARATELY P/N : 620946004
- MARKING: CAVITY REDUCER AND PACKAGING MUST BE MARKED WITH: 620946015 + DATE CODE

DIMENSIONS: mm (inch are given for information only)



Estimated weight: 5.8 g

CREATION				
J27 (1101)				
PEN: 20177706-10A				
1 211. 20177700 107				
NOM: Ramos D.				
DATE: Nov. 24, 2017	/	/	/	/
APPR.: Zuniga F.	Issue	Revisions	Name	Approved

4112_9311

This information is given as

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL

an indication.In the continual goal to improve our products, we reserve the right to make any modifications judged necessary